

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-115-21332-00-00
Spot: NWSE Sec/Twnshp/Rge: 8-19S-1E
1980 feet from S Section Line, 1980 feet from E Section Line
Lease Name: ENNS Well #: 1
County: MARION Total Vertical Depth: 2927 feet

Operator License No.: 5120
Op Name: RANGE OIL COMPANY, INC.
Address: 125 N MARKET ST STE 1120
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	283		160 SX
TI	2.375	2917		
PROD	4.5	2926		185 SX

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 03/01/2012 8:00 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: ALAN NATION Company: _____ Phone: (620) 222-4304

Proposed Plugging Method: SAND @ 2840 AND CAP WITH 4 SX. 1" BACKSIDE, CIRCULATE FROM 340' TO SURFACE, AND TOP OFF.

Plugging Proposal Received By: _____ Witness Type: NONE
Date/Time Plugging Completed: 04/11/2012 8:00 AM KCC Agent: PATRICK SHIELDS

Actual Plugging Report:

(PER QUALITY WELL SERVICE TICKET #5399) SANDED OFF TO 2840' AND CAPPED WITH 4 SX FO 60/40 4% GEL. RAN DOWN BACKSIDE TO 340' AND PUMPED 65 SX CIRCULATED TO SURFACE. RAN 2 3/8" INSIDE 4 1/2" AND CIRCULATED 75 SX TO SURFACE. TOPPED OFF WITH 10 SX.

Perfs:

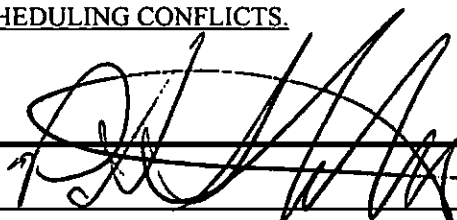
Top	Bot	Thru	Comments
2896	2904		

Remarks: PLUGGING WAS NOT WITNESSED DUE TO SCHEDULING CONFLICTS.

Plugged through: TBG

District: 02

Signed _____

 5/11/12

(TECHNICIAN)

✓JK

Form CB-2/3
RECEIVED
APR 20 2012
KCC WICHITA