


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Ness County. Sec. 29 Twp. 17S Rge. 25 R/W
Location as "NE/CNW}SW}" or footage from lines
SE SW

Lease Owner Kansas Oil Corporation
Lease Name Norton-Reed "B" Well No. 2
Office Address 400 N. Woodlawn, Wichita, Kansas 67208
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole

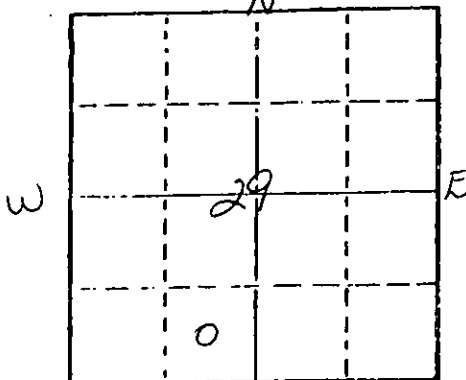

Date Well completed May 29 1978
Application for plugging filed (verbally) May 29 1978
Application for plugging approved (verbally) May 29 1978
Plugging commenced May 29 1978
Plugging completed May 29 1978
Reason for abandonment of well or producing formation No commercial quantity of oil or gas encountered
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4435'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set first plug at 720' with 70 sacks
second plug at 240' with 20 sacks
third plug at 40' to surface with 10 sacks
Cemented with 50/50 posmix, 6% gel.

JUN 05 1978

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.

STATE OF Kansas COUNTY OF Sedgwick, ss.
Jack L. Partridge, Assistant Secretary-Treasurer (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack L. Partridge
801 Union Center, Wichita, Kansas 67202
(Address)



AND SWORN TO before me this 2nd day of June, 1978
Sandra Richman
Sandra Richman Notary Public.
My commission expires July 21, 1979

OPERATOR: Kansas Oil Corporation
 CONTRACTOR: Abercrombie Drilling, Inc.
 WELL NAME: Norton-Reed "B" #2
 LOCATION: SE SW Section 29-17S-25W
 Ness County, Kansas
 SPUD DATE: May 20, 1978
 COMPLETION DATE: May 29, 1978

0	280	Sand & shale
280	1275	Shale & sand
1275	1500	Sand
1500	1608	Shale
1608	1770	Sand & shale
1770	1798	Anhydrite
1798	2205	Sand & shale
2205	2507	Shale & lime
2507	2804	Shale
2804	3378	Shale & lime
3378	3463	Lime
3463	4200	Shale & lime
4200	4394	Lime
4394	4425	Shale & lime
4425	4435	Lime
	4435	Rotary Total Depth

Spud hole at 4:00 p.m., May 20, 1978. Drilled 282' of 12 1/4" hole. Ran 7 joints of 8-5/8" surface casing. Set at 278' K.B. with 185 sacks common cement, 2% gel, 3% CaCl. Cement did circulate. Pumped plug to 260' K.B. Plug was down at 11:15 p.m., May 20, 1978.

T.D. 4435'. Set first plug at 720' with 70 sacks, second plug at 240' with 20 sacks, third plug at 40' to surface with 10 sacks. Cemented with 50/50 posmix, 6% gel. State Plugger - Leo Massey. Job complete at 12:15 p.m., May 29, 1978.

SAMPLE TOPS:
 Anhydrite 1770' (-1798')


STATE OF KANSAS)
 COUNTY OF SEDGWICK) ss

Jack L. Partridge, Assistant Secretary-Treasurer of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the Norton-Reed "B" #2, SE SW Section 29-17S-25W, Ness County, Kansas.

ABERCROMBIE DRILLING, INC.

BY Jack L. Partridge
 Jack L. Partridge,
 Assistant Secretary-Treasurer

Subscribed and sworn to before me, a Notary Public, in and for the county and state aforesaid, as of this 2nd day of June, 1978.



Sandra Richman
 Sandra Richman, Notary Public