

15-135-19089-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Map Required Affidavit
Map or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Ness County, Sec. 25 Twp. 17S Rge. (E) 25 (W)

Location as "NE/CNW&SW&" or footage from lines C NE/4, NE/4

Lease Owner Sunray DX Oil Company

Lease Name Mildred Schaben Well No. 1

Office Address P. O. Box 729, Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed April 1 19 63

Application for plugging filed April 11 19 63

Application for plugging approved Yes April 1 19 63

Plugging commenced April 1 19 63


Plugging completed April 1 19 63

Reason for abandonment of well or producing formation

No commercial oil found

If a producing well is abandoned, date of last production ---- 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

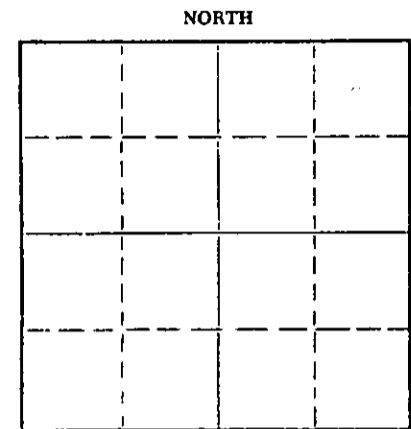

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas

Producing formation ---- Depth to top ---- Bottom ---- Total Depth of Well 4525 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	280'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from ---- feet to ---- feet for each plug set.

25 sacks cement plug at 500' to 419'
25 sacks cement plug at 240' to 172'
wood plug and 10 sacks cement at 140' to 12'
all intervals between - plugs filled with 9.8# mud laden fluid

APR 22 1963

Name of Plugging Contractor Stickle Drilling Company
Address Tulsa, Oklahoma

STATE OF KANSAS COUNTY OF BARTON ss.
C. H. PETERSON

(employee of owner) or (owner of interest) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. H. Peterson, District Engineer
P. O. Box 729, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 19th day of April, 19 63

My commission expires 2-22-67 D. L. Jackson Notary Public.

Sunray DX Oil Company
Tulsa, Oklahoma

Tulsa, Oklahoma
April 4, 1963

Contractor: Stickle Drilling Company
Date Commenced: March 18, 1963
Date Completed: April 2, 1963

Mildred Schaben No. 1
NE NE Sec. 25-178-25W
Ness County, Kansas

DRILLER'S LOG

Depth Figures Indicate Base of Formations

Shale and clay	305
Red bed and shale	1088
Anhydrite	1118
Shale and sand	1665
Shale and lime	1900
Shale	2230
Shale and lime	2715
Lime	2925
Shale and lime	3184
Shale and chalky lime	3375
Shale	3642
Shale and lime	3795
Lime	3972
Lime with chert	4064
Lime	4250
Lime and shale	4314
Lime	4410
Lime and chert	4525 TD
TD Corrected by Electric Log	4523

RECEIVED
STATE CORPORATION COMMISSION
APR 12 1963
CONSERVATION DIVISION
Wichita, Kansas

I, Fred E. Stickle, hereby certify the above to be a true and complete Driller's Log of Sunray DX Oil Company's Mildred Schaben No. 1, NE NE Sec. 25-178-25W, Ness County, Kansas.


Fred E. Stickle


Notary Public

My Commission Expires January 11, 1967