

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission
 Conservation Division
 800 Bitting Building
 Wichita, Kansas

FILE NO. _____

LOCATION NE NE SESEC. 31 TWP. 11 RGE. 17Dry Hole Abandoned Oil Well _____ Abandoned Gas Well _____

I have today completed supervision of plugging of:


Well No. 2 Lease HadleyOperator Brooks Pierce Address Wichita, KansField Bemis County EllisTotal Depth 3710 Feet.

(Describe briefly the manner in which the well was plugged)

8 5/8" at 290' circulated with cement - 5 1/2" at 3709' with
100 sax cement behind.

Top perforations at 3673' - chat to 3670' run 5 sax cement
with dump bailer - pulled 3100' of 5 1/2", mudded hole to
250', set wood plug, rock bridge and 15 sax cement, filled
with mud to 35', set wood plug, rock bridge and 10 sax cement
to bottom cellar.

2-16-50

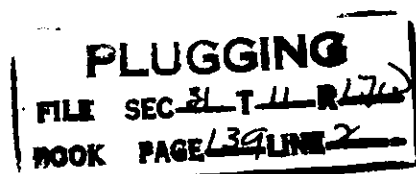

John Peay
 District Conservation Agent

Date 2-15-50