

15-135-21541-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Ness County. Sec. 35 Twp. 16S Rge. 24W E/W
Location as "NE/CNW 1/4 SW 1/4" or footage from lines
C NW NW


Lease Owner Beren Corporation
Lease Name Horchem Well No. #1
Office Address 970 Fourth Financial Center, Wichita, Kansas
Character of Well (Completed as Oil, Gas or Dry Hole)
dry hole

Date Well completed December 24, 1978 19
Application for plugging filed December 24, 1978 19
Application for plugging approved December 24, 1978 19
Plugging commenced December 24, 1978 19
Plugging completed December 24, 1978 19
Reason for abandonment of well or producing formation
dry hole

If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4548'
Show depth and thickness of all water, oil and gas formations.

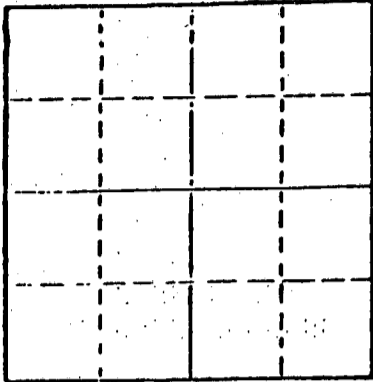

Locate well correctly on above
Section Plot

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set. Hole plugged with 50-50 pozmix, 6% gel, as follows: 70 sacks @ 720', 20 sacks @ 240', hulls and 10 sacks @ 40'. Plugging completed 1:30 a.m., December 24, 1978.

RECEIVED
STATE CORPORATION COMMISSION

JAN 4 1979
01-04-1979
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Strata Drilling Company


STATE OF KANSAS COUNTY OF BARTON, ss.
Charles W. Steincamp (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Charles W. Steincamp
P. O. Box 355, Great Bend, Kansas 67530
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of December, 1978.

Loneita Barry
Loneita Barry Notary Public.

My commission expires 3-28-80.



15-135-21541-00-00

D R I L L E R S L O G

Horchem #1

CASING RECORD: 8 jts. used 8-5/8" surface casing	COMPANY: Beren Corporation	DESCRIPTION: C NW NW Section 35-16S-24W Ness County, Kansas
TOTAL ROTARY DEPTH: 4548'	CONTRACTOR: Strata Drilling Company	
	COMMENCED: December 15, 1978	
	COMPLETED: December 24, 1978	

D & A

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Surface soil, shale	0	330	Ran 313' used 8-5/8" surface casing,
Shale, sand	330	1839	set and cemented at 318' with 150
Anhydrite	1839	1871	sacks 60-40 pozmix, 50 sacks common,
Shale	1871	2090	3% C.C. Cement circulated. Plug
Shale, lime streaks	2090	2490	down 8:30 p.m., December 15, 1978.
Lime and shale	2490	2950	
Lime	2950	3200	Ran 3 drill stem tests.
Lime and shale	3200	4548	Ran 1 electric log.
			Hole plugged with 50-50 pozmix, 6% gel, as follows: 70 sacks at 720', 20 sacks @ 240', hulls and 10 sacks at 40'. Plugging completed 1:30 a.m., December 24, 1978.

RECEIVED
STATE CORPORATION COMMISSION
01-04-1979
JAN - 4 1979
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
) ss
COUNTY OF BARTON)

I certify that this is a true and correct copy of the above log to the best of my knowledge.

STRATA DRILLING COMPANY

Charles W. Steincamp
Charles W. Steincamp

Sworn to and subscribed before me this 29th day of December, 1978.

My appointment expires 3-28-80.

Loneita Barry
Loneita Barry, Notary Public

