


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Get All information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

Ness County, Sec. 28 Twp. 17 Rge. 21W(E) (W)  
Location as "NE/CNW&SW" or footage from lines App. C NE SE  
Lease Owner Donald C. Slawson  
Lease Name Wagner 'F' Well No. 1  
Office Address Suite 408 One Twenty Building-Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed March 15, 19 69  
Application for plugging filed March 15, 19 69  
Application for plugging approved March 15, 19 69  
Plugging commenced March 15, 19 69  
Plugging completed March 15, 19 69  
Reason for abandonment of well or producing formation Dry Hole

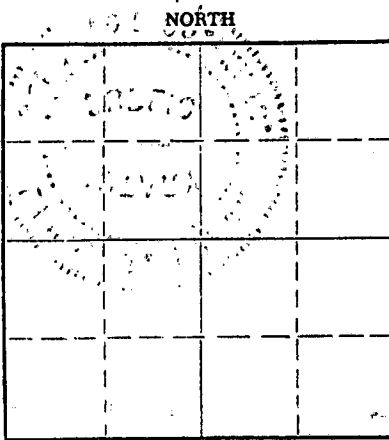

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation Depth to top Bottom Total Depth of Well 4213 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	349	8 5/8"	X	
		0	4191	4 1/2"	X	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Open hole T.D. 4213' Plugged back to 4157' with rock. Dumped 4 sax cement on rock. Welded cap on 4 1/2" csg at surface


This temporary plugging will protect all subsurface formations until the well is completed as a salt water disposal well or is permanently abandoned

Note: 4 1/2" set at 4191', D.V. Tool at 1454'; cemented with 100 sax 50-50 Poz salt sat. w/ 3/4% CFR-2, preceded by 250 Gals. mud flush; 2nd stage - Howco Lite with 10# sac Gilsonite

RECEIVED  
STATE CORPORATION COMMISSION  
APR 1 1969  
CONSERVATION DIVISION  
Wichita, Kansas  
04-01-1969

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Bill Hay Drilling Company  
Address 2007 Palk Street - Great Bend, Kansas 67530

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
JAMES C. REMSBERG (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.



(Signature) James C. Remsberg  
408 One Twenty Building - Wichita, Kansas  
(Address)

Subscribed and sworn to before me this 28th day of March, 1969  
Linda R. Sparr  
Linda R. Sparr Notary Public.  
My commission expires May 15, 1971

15-135-20227-00-00

WELL LOG

Company: Donald C. Slawson  
 Suite 408 One Twenty Building  
 Wichita, Kansas 67202

Lease: Wagner 'F' #1  
 C NE SE, Section 28-17-21W  
 Ness County, Kansas

Total Depth: 4202' Elevation: 2164 K.B.

Contractor: Slawson Drilling Company, Inc.

Commenced: January 31, 1969

Completed: February 12, 1969

Casing: 8 5/8" at 349' with 200 sx cement  
 4 1/2" at 4191' with 100 sx cement

0-170	Surface Clay
170-1436	Shale & Shells
1436-1471	Anhydrite
1471-2242	Shale & Shells
2242-3646	Lime & Shale
3646-4146	Lime
4146-4202	Sand
4202	Total Depth


RECEIVED  
 STATE CORPORATION COMMISSION  
 MAR 6 1969  
 CONSERVATION DIVISION  
 Wichita, Kansas  
 03-06-1969


STATE OF KANSAS )  
 ) SS:  
 COUNTY OF SEDGWICK )

I, Donald C. Slawson, of the Slawson Drilling Company, Inc., upon oath state that the above and foregoing is a true and correct copy of the log of the Wagner 'F' #1 well.

  
 DONALD C. SLAWSON

Subscribed and sworn to before me this 21st day of February, 1969.



  
 Linda R. Sparr, Notary Public