

15-135-00042-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

Ness County, Sec. 6 Twp. 17 Rge. (E) 25 (W)

Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines SE $\frac{1}{4}$ SE $\frac{1}{4}$ SE $\frac{1}{4}$

Lease Owner Barnett Oil Company, et al

Lease Name Stutz Well No. 1

Office Address 417 First Nat'l. Bank Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed October 18 19 51

Application for plugging filed October 18 19 51

Application for plugging approved October 18 19 51


Plugging commenced October 18 19 51

Plugging completed October 18 19 51

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production - 19 -

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

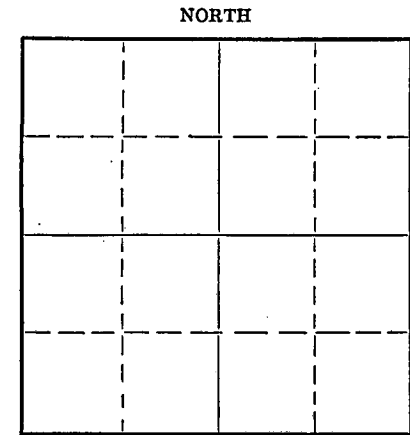

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well C. D. Stough

Producing formation Depth to top Bottom Total Depth of Well 4870 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD


Formation	Content	From	To	Size	Put In	Pulled Out
Surface Pipe		-0-	310	8 5/8"	310	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud from 4870 ft. to 310 ft. Set wooden plug at 310 ft. and filled surface casing with 15 sacks of cement and 1/2 sack of hulls to 263 ft. Filled surface casing with heavy mud from 263 ft. to 35 ft. Set wooden plug at 35 ft. and filled surface casing with 10 sacks of cement and 1/2 sack of hulls to bottom of cellar.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Barnett Oil Company
Address 417 First Nat'l. Bank Bldg., Wichita, Kansas



STATE OF Kansas, COUNTY OF Sedgwick, ss.

W. R. Hunter (employee of owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. R. Hunter

417 First Nat'l Bank Bldg., Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 19th day of October, 19 51

My commission expires May 12, 1955

Adelaide Olivier Notary Public.

23-5091-s 8-50-10M

PLUGGING
FILE SEC 6 T 17 R 25
BOOK PAGE 118 LINE 25

BARNETT OIL COMPANY, ET AL
LOG OF STUTZ WELL NO. 1
SE¹/₄ SE¹/₄ SE¹/₄ SECTION 6-17S-25W, NESS COUNTY, KANSAS

DATE COMMENCED: Sept. 26, 1951

DATE COMPLETED: Oct. 18, 1951

<u>Formation</u>	<u>From</u>	<u>To</u>	<u>Remarks</u>
Surface Clay	0	10	
Sand	10	30	
Sandy Shale	30	40	
Shale	40	50	
Sand	50	65	
Sandy Shale	65	126	
Shale	126	206	
Shells and Shale	206	2065	Set 8 5/8" 21# Surface Casing at 310 ft; Cemented with 125 Sacks of Cement.
Anhydrite	2065	2108	
Shale and Shells	2108	2170	
Shale and Lime	2170	2620	
Shale and Shells	2620	2703	
Lime and Shale	2703	3305	
Lime	3305	3365	
Lime and Shale	3365	3530	
Lime	3530	3775	
Lime and Shale	3775	3835	
Lime	3835	4292	
Lime and Shale	4292	4325	
Lime	4325	4870	
Total Depth		4870	Dry and Abandoned

CERTIFICATE

I, W. R. Hunter, Office Manager of Barnett Oil Company, certify that to the best of my knowledge and belief, the above is a true and correct log of the Stutz Well No. 1 in the SE¹/₄ SE¹/₄ SE¹/₄ of Section 6-17S-25W, Ness County, Kansas.

W. R. Hunter

Subscribed and sworn to before me, a Notary Public, in and for the County of Sedgwick, State of Kansas, this 24th day of October, 1951.

Adelaide Olivier
Notary Public.

My Commission Expires May 12, 1955.

RECEIVED
 STATE CORPORATION COMMISSION
 OCT 29 1951
 CONSERVATION DIVISION
 Wichita, Kansas

PLUCON
 FILE SEC 6-T-17-25W
 BOOK PAGE 118 LINE 26