


15-135-2146-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

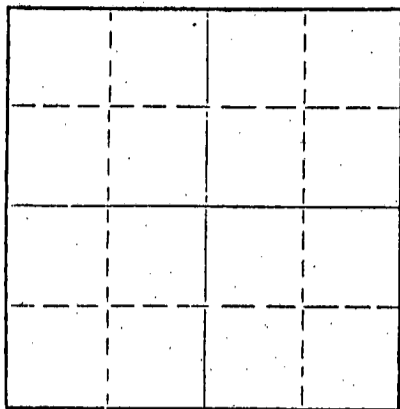

Locate well correctly on above
Section Plat

Ness County, Sec. 6 Twp. 17S Rge. (E) 25 (W)
Location as "NE/CNWxSWx" or footage from lines C SE NW
Lease Owner Chief Drilling Co., Inc.
Lease Name Stutz "A" Well No. #1
Office Address 905 Century Plaza, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 2-14-78 19
Application for plugging filed 2-16-78 19
Application for plugging approved 2-14-78 19
Plugging commenced 2-14-78 19
Plugging completed 2-14-78 19
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 4501' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	342'	8 5/8"		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged through drill pipe @ 720' w/70 sx. cement
Plugged through drill pipe @ 240' w/20 sx. cement
Plugged through drill pipe @ 40' w/10 sx. cement

RECEIVED
STATE CORPORATION COMMISSION

FEB 22 1978

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Chief Drilling Co., Inc.
Address 905 Century Plaza, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK
V. Richard Hoover (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) V. Richard Hoover
905 Century Plaza, Wichita, Ks. 67202
(Address)

SUBSCRIBED AND SWORN to before me this 16th day of February, 1978

Marilyn Sinard
Marilyn Sinard Notary Public.

My commission expires

MARILYN SINARD
STATE NOTARY PUBLIC
SEDGWICK COUNTY, KANSAS
MY COMM. EXP. APR. 30, 1979

15-135-21416-00-00

WELL LOG

CHIEF DRILLING CO., INC.
905 Century Plaza
Wichita, Kansas 67202

#1 Stutz "A"
C SE NW Sec. 6-17S-25W
Ness County, Kansas

CONTRACTOR: Warrior Drilling, Inc.
CASING RECORD: 8 5/8" @ 342' w/210 sx.

COMMENCED: February 5, 1978
COMPLETED: February 14, 1978

FORMATION	FROM	TO	ELEVATIONS
Surface Sand & Shale	0	55	2545 Gr.
Shale & Sand	55	350	2548 D.F.
Shale	350	668	2550 K.B.
Shale & Sand	668	1903	
Anhydrite	1903	1940	
Shale	1940	3616	
Lime & Shale	3616	3686	
Shale	3686	4042	
Lime & Shale	4042	4280	
Lime	4280	4501	
Total Depth	4501		

FORMATION TOPS	
Anhydrite	1903 + 647
Base Anhy.	1940 + 610
Heebner	3811 - 1261
Lansing	3847 - 1297
BKC	4162 - 1612
Ft. Scott	4365 - 1815
Miss. Dolo.	4473 - 1923
RTD	4501 - 1951

D & A

RECEIVED
STATE CORPORATION COMMISSION

FEB 22 1978

CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK) ss:

I hereby certify that the above is a true and correct copy of the Driller's Log of the well drilled in the Ness C SE NW of Section 6-17S-25W, County, Kansas, to the best of my knowledge and belief.

CHIEF DRILLING CO., INC.

V. Richard Hoover
V. Richard Hoover - President

Subscribed and sworn to before me this 20th day of February, 1978

MARILYN SINARD
STATE NOTARY PUBLIC
SEDGWICK COUNTY, KANSAS
MY COMM. EXP. APR. 30, 1979

Marilyn Sinard
Marilyn Sinard Notary Public