

15-135-20857-00-00


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Commission

P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

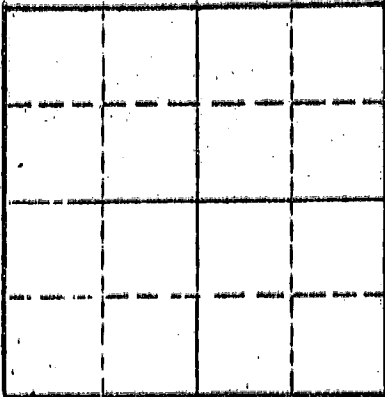

Locate well correctly on above  
Section Plat

Ness County, Sec. 4 Twp. 17 Rge. 25 (E) W (W)  
Location as "NE/CNW/SE/SW" or footage from lines C SE SW  
Lease Owner Phillips Petroleum Company  
Lease Name Mollenkamp 'AB' Well No. 1  
Office Address Box 287, Great Bend, Kansas 67530  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 4/4/74 10  
Application for plugging filed 4/4/74 10  
Application for plugging approved 4/4/74 10  
Plugging commenced 4/4/74 10  
Plugging completed 4/4/74 10  
Reason for abandonment of well or producing formation Dry Hole  
If a producing well is abandoned, date of last production 10  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey, Hays, Kansas  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4510 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	8-5/8"			8-5/8"	307'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

1st Plug @ 4510-4310 75 sacks  
2nd plug @ 1180 to 1080' 50 sacks  
3rd plug 357 to 257' 50 sacks  
Top plug 40' to top of 8-5/8" casing

STATE RECEIVED  
STATE CORPORATION COMMISSION  
APR 23 1974  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Slawson Drilling Company  
Address 408 One Twenty Bldg. Wichita, KS 67202

STATE OF Kansas COUNTY OF Barton ss.  
C. D. Dohrer (employee of owner) or (agent) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. D. Dohrer Prod. Supt.  
Box 287, Great Bend, Kansas 67530  
(Address)

Subscribed and sworn to before me this 15th day of April 1974



My commission expires 10-27-77 Notary Public.

DRILLERS LOG

COMPANY: Phillips Petroleum Company  
 Box 287  
 Great Bend, Kansas 67530

LEASE NAME: MOLLENKAMP 'AB' No.1  
 C SE SW 4-17-25W  
 Ness County, Kansas

CONTRACTOR: SLAWSON DRILLING COMPANY, INC.  
 408 One Twenty Building  
 Wichita, Kansas 67202

Total Depth: 4510'

Commenced: 3/25/74

Completed: 4/4/74

Casing: 307' 8-5/8" with 250 sax cement

0 to 310	Surface hole
310 to 1200'	Shale & Shells
1200 to 1810'	Shale & shells
1810 to 1851	Shale & Shells
1851 to 1883	Anhydrite
1883 to 2380	Shale & Lime
2380 to 4002	Lime and Shale
4002 to 4154	Lime
4154 to 4326	Lime & Shale
4326 to 4499	Lime
4499 to 4510	Miss
4510	TD

RECEIVED  
 STATE CORPORATION COMMISSION  
 APR 23 1974  
 CONSERVATION DIVISION  
 Wichita, Kansas

STATE Kansas  
 COUNTY Sedgwick

I, James C. Remsberg, of the Slawson Drilling Company, Inc. upon oath sate that the above and foregoing is a true and correct copy of the log of the Mollenkamp 'AB' No.1 well.



*James C. Remsberg*  
 James C. Remsberg

Subscribed and sworn to me on April 11, 1974

*Mary Lou Taylor*  
 Mary L. Taylor

My commission expires January 17, 1977.