

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

Reno County, Sec. 16 Twp. 24 Rge. 4 (E) (W) X

Location as "NE/CNW/SW" or footage from lines NW NE NW

Lease Owner Misco United Supply Inc.

Lease Name Collins B Well No. #1

Office Address Box 257 Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 2-22-73 19


Plugging commenced 3-20-73 19

Plugging completed 3-22-73 19

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced?

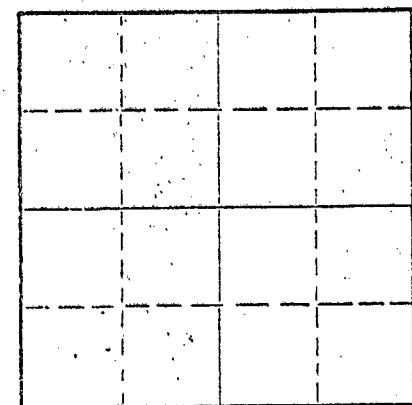

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Gilbert Toman

Producing formation Depth to top Bottom Total Depth of Well 3830' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				7"	3829'	2450.74'
				10 3/4"	330'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 2900'. Mixed and ran 6 sacks cement thru dump bailer.

Squeezed hole with 2 sacks hulls - 5 sacks gel 0 35 sacks cement - 2 sacks hulls 10 sacks gel. Displaced with 20 sacks cement.

RECEIVED  
STATE CORPORATION COMMISSION

MAR 28 1973

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co.

Address Box 364 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described


well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed, and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.

Box 364 Great Bend, Kansas

(Address)

SUBSCRIBED AND SWORN to before me this 23 day of March, 1973



Sidney D. Miller

Notary Public.

My commission expires October 1976

## B &amp; B DRILLING, INC.

207 Petroleum Building  
Wichita, Kansas 67202

April 30, 1970

RECEIVED  
STATE CORPORATION COMMISSION

FEB 22 1973

CONSERVATION DIVISION  
Wichita, KansasDRILLERS LOGRe: Collins "B" #1  
NW. NE NW Section 16-24S-4W  
Reno County, KansasOPERATOR: J. A. Allison  
CONTRACTOR: B & B Drilling, Inc.  
COMMENCED: April 17, 1970  
COMPLETED: April 29, 1970

Set 10 3/4" @ 330' w/300 sx

0	330	Surface
330	378	Shale & Shells
378	801	Shale & Shells
801	1022	Shale & Shells
1022	1326	Shale
1326	1907	Shale & Lime Streaks
1907	2133	Shale
2133	2679	Shale & Lime
2679	2965	Shale & Lime
2965	3058	Lime
3058	3275	Lime & Shale
3275	3447	Lime & Chert
3447	3628	Shale & Lime
3628		Core to Total Depth
3830		Total Depth

Set 7" Casing @ 3829' w/100 sx

We certify the above and foregoing to be true  
and correct copy of the log on the #1 "B" Collins  
Located in Reno County, Kansas.Bill Lakout PresidentAlma A. Heiser Notary Public  
Subscribed and sworn to before me this  
30th day of April, 1970  
My commission expires May 31, 1970