

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-015-22831-00-00  
Spot: NWSWNENW Sec/Twnshp/Rge: 16-26S-8E  
4394 feet from S Section Line, 3704 feet from E Section Line  
Lease Name: LIGGETT Well #: 5  
County: BUTLER Total Vertical Depth: 2600 feet

Operator License No.: 30931  
Op Name: DAYSTAR PETROLEUM, INC.  
Address: 522 N. MAIN ST PO BOX 560  
EUREKA, KS 67045

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	305		200 SX
PROD	5.5	2588	800	150 SX
PROD	5.5	2589		

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 03/01/2012 12:00 AM  
Plug Co. License No.: 34685 Plug Co. Name: RCCA WELL SERVICE, LLC

Proposal Rcvd. from: \_\_\_\_\_ Company: \_\_\_\_\_ Phone: \_\_\_\_\_

Proposed Plugging Method: Per KCC District 2 requirements

Plugging Proposal Received By: DAN FOX Witness Type: NONE  
Date/Time Plugging Completed: 03/28/2012 2:30 PM KCC Agent: PATRICK SHIELDS

Actual Plugging Report:

RAN 2" TUBING TO TD AND STACKED OUT. PULLED UP A JOINT AND SPOTTED A 25 SX PLUG OF 60 X 40 4% GEL @ 2400. TAGGED BOTTOM PLUG AT 2320'. SHOT CASING AND RECOVERED 800' OF 5.5 CASING RAN TUBING BACK IN TO 350' AND CIRCULATED CEMENT TO SURFACE (143 SX). CONSOLIDATED TICKET #: 100056

Perfs:

Top	Bot	Thru	Comments
2448	2450	CSG	


RECEIVED  
MAY 01 2012  
KCC WICHITA

Remarks: PLUGGING WAS UNWITNESSED DUE TO SCHEDULING CONFLICTS.

Plugged through: TBG

District: 02

Signed

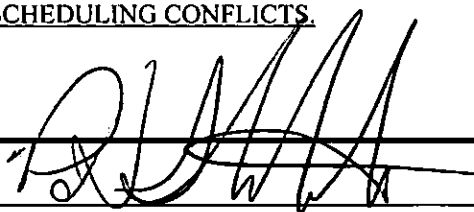

(TECHNICIAN)

5/07/12

1/2