


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

15-05102579-00-00

NORTH

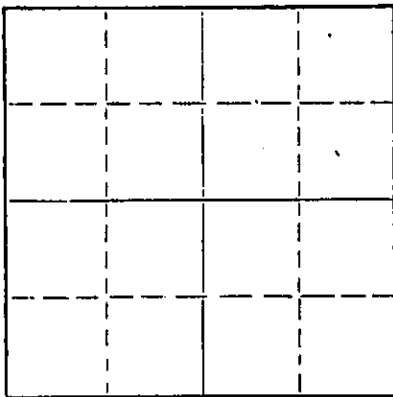

Locate well correctly on above
Section Plat

Ellis County. Sec. 3 Twp. 13 Rge. 16 (E) (W)
SW SW SW

Location as "NE/CNW/SW" or footage from lines
Lease Owner Haynes Oil Company
Lease Name Froelick A#4 Well No.
Office Address Russell, Kansas 67665
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 6/11/69 19
Plugging completed 7/26/69 19
Reason for abandonment of well or producing formation depleted.
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Massey
Producing formation Depth to top Bottom Total Depth of Well 3460 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	200'	none
				4-1/2	3460'	2741'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked bottom to 3266', pushed plug to 3266' and dumped 4 sacks of cement on plug, top cement 3227', shot pipe at 2840', 2735', worked pipe loose, loaded hole with 40 barrels water. Pulled 86 joints. Pumped 4 sacks hulls and 20 sacks gel and 100 sacks of cement, 6% posmix to plug well.


PLUGGING COMPLETE.

STATE RECEIVED
AUG 5 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
CHASE, KANSAS (Address)



Subscribed and Sworn to before me this 28th day of July, 1969

My commission expires 2/15/71 Notary Public.

DRILLERS LOG
Proellish "A" 4
SW SW SW 3-13-16
Ellis County, Kansas

OPERATOR: Fred J. Haynes
Box 329, Russell, Kansas

15-051-02579-00-00

CONTRACTOR: Haynes Drilling Company
Box 329, Russell, Kansas

COMMENCED: April 5, 1963

CASING - 8 5/8" at 201'w/150sks
4 1/2" at 3465'w/100sks

COMPLETED: April 16, 1963

I. P. - 25 BOPD

FORMATION:

Surface Clay, Sand & Shale	195
Shale & Sand	850
Red Bed & Shale	1102
Anhydrite	1102-1144
Shale & Shells	1780
Lime & Shale	2570
Lime & Shale	3015
Lime & Shale	3280
Lime & Shale and Total Depth	3466'

RECEIVED
STATE CORPORATION COMMISSION
MAY 20 1969
CONSERVATION DIVISION
Wichita, Kansas

I certify that the above is true and correct to
the best of my knowledge.

Danell E. Haynes