

15-101-20385-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Lane _____ County. Sec. 12 Twp. 16s Rge. 27WR/W
Location as "NE/CNW/SW" or footage from lines _____

NW SE NE
Lease Owner Kansas Oil Corporation
Lease Name Carter Well No. 1

Office Address 400 N. Woodlawn, Wichita, KS 67208
Character of Well (Completed as Oil, Gas or Dry Hole) _____


Dry Hole

Date Well completed 6-8-79 19
Application for plugging filed 6-8-79 19
Application for plugging approved 6-8-79 19
Plugging commenced 6-8-79 19
Plugging completed 6-8-79 19
Reason for abandonment of well or producing formation _____

Dry Hole

If a producing well is abandoned, date of last production
N/A 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

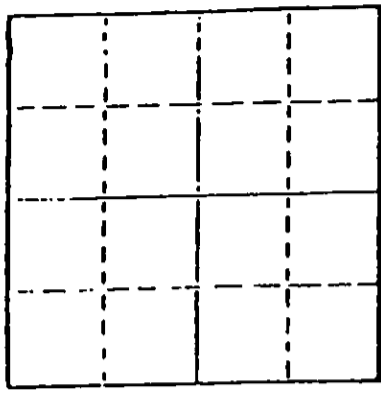

Locate well correctly on above
Section Plot

Name of Conservation Agent who supervised plugging of this well Gil Balthazor
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4565
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Sand				8 5/8"	275'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

Plugged: 70 sx 750'
20 sx 260'
10 sx 40'
5 sx RH
50 -50 PAZ 6 % gel

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Service Company

STATE OF Kansas COUNTY OF Sedgwick, ss.
Paul A. Seymour, Jr. (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) Paul A. Seymour, Jr.
Box 8287, Munger Station, Wichita, KS 67208
(Address)

SUBSCRIBED AND SWORN TO before me this 11th day of June, 19 79

Ruth M. Bassett
Ruth M. Bassett Notary Public.

My commission expires May 30, 1983

RECEIVED
STATE CORPORATION COMMISSION
JUN 14 1979
CONSERVATION DIVISION
Wichita, Kansas

15-101-20385-00-00

BIG SPRINGS DRILLING, INC.

P.O. BOX 8287
MUNGER STATION
WICHITA, KANSAS 67208

SUITE 29 • 400 NORTH WOODLAWN • (316) 681-1732

June 11, 1979

DRILLERS LOG

Re: Carter No. 1
NW SE NE
Sec. 12-Twp 16s-Rq 27W
Lane County, Kansas

OPERATOR: Kansas Oil Corporation
CONTRACTOR: Big Springs Drilling, Inc.
COMMENCED: 6-1-79
COMPLETED: 6-9-79

Surface Pipe: 289' of 8 5/8" w/175 sx Common 2% gel 3% ccl

0	289	Sand and Shale
289	2030	Shale and Clay
2030	2063	Anhydrite
2063	2295	Shale and Shells
2295	3657	Shale
3657	4030	Lime and Shale
4030	4565	Lime
4565		RTD


RECEIVED
STATE CORPORATION COMMISSION
JUN 13 1979
COMMISSION DIVISION
Wichita, Kansas

We certify that the above and foregoing is a true and correct copy of the log on the # 1 Carter located in Lane County, Kansas.

BIG SPRINGS DRILLING, INC.


Paul A. Seymour, Jr.

Subscribed and sworn to before me this 11th day of June, 1979.


Ruth M. Bassett Notary Public

My Commission Expires:

May 30, 1983