


15-101-20544-00-00

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

WELL PLUGGING RECORD

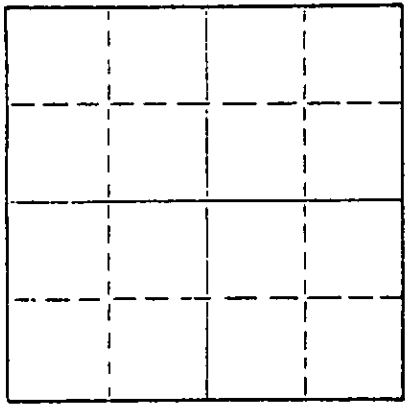

Locate well correctly on above Section Plat

Lane \_\_\_\_\_ County, Sec. 10 Twp. 16 Rge. \_\_\_\_\_ (E) 27W (W)  
Location as "NE/CNW/SE/SW" or footage from lines SW NW NW  
Lease Owner DONALD C. SLAWSON  
Lease Name Mendenhall '0' Well No. 1  
Office Address 200 Douglas Building Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed June 13, 19 81  
Application for plugging filed June 13, 19 81  
Application for plugging approved June 13, 19 81  
Plugging commenced June 13, 19 81  
Plugging completed June 13, 19 81  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4550 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		surface	360'	8 5/8"		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

1st plug @ 850' w/60 sx  
2nd plug @ 380' w/30 sx  
Solid Bridge @ 40' w/10 sx  
5 sx in Rat Hole

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor SUN OIL WELL CEMENTING, INC.  
Address Box 169 Great Bend, Kansas 67530


STATE OF KANSAS COUNTY OF SEDGWICK ss.

William R. Horigan (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) William R. Horigan  
WILLIAM R. HORIGAN, Operations Engineer  
200 Douglas Building Wichita, Kansas 67202  
(Address)

SUBSCRIBED AND SWORN TO before me this 21st day of August, 19 81

My commission expires 06/12/82



Sherry L. Kendall  
SHERRY L. KENDALL  
Notary Public.

WELL LOG

15-101-20544-00-00

OPERATOR: DONALD C. SLAWSON  
 200 DOUGLAS BUILDING  
 WICHITA, KANSAS 67202

LEASE: #1 Mendenhall 'Q'  
 SW NW NW Sec. 10-16-27W  
 Lane County, Kansas

CONTRACTOR: SLAWSON DRILLING COMPANY, INC.  
 200 DOUGLAS BUILDING  
 WICHITA, KANSAS 67202

COMMENCED: June 4, 1981

COMPLETED: June 13, 1981

CASING: Surface - 8 5/8" @ 360' w/275 sx 60/40 poz

0 - 364 Surface  
 364 - 1275 Shale  
 1275 - 1920 Shale and shells  
 1920 - 2338 Shale  
 2338 - 3757 Shale and shells  
 3757 - 3938 Shale and lime  
 3938 - 4550 Lime  
 4550 RTD

STATE OF KANSAS )  
 )  
 COUNTY OF SEDGWICK ) SS.

I, James C. Remsberg, OF THE SLAWSON DRILLING COMPANY, INC.  
 UPON OATH STATE THAT THE ABOVE AND FOREGOING IS A TRUE AND CORRECT COPY OF THE  
 LOG OF THE #1 Mendenhall 'Q' TEST.

James C. Remsberg  
 JAMES C. REMSBERG, President

SUBSCRIBED AND SWORN TO BEFORE ME THIS 21st DAY OF August, 1981.

Sherry L. Kendall  
 SHERRY L. KENDALL, Notary Public

MY COMMISSION EXPIRES : 06/12/82

