

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-063-21885-00-00
Spot: NWSENESE Sec/Twnshp/Rge: 6-14S-31W
1726 feet from S Section Line, 452 feet from E Section Line
Lease Name: HBP Well #: 1
County: GOVE Total Vertical Depth: 4758 feet

Operator License No.: 32016
Op Name: WELLS, RODGER D. DBA PIONEER RES
Address: 80 WINDMILL DR.
PHILLIPSBURG, KS 67661

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	4748		175 SX
SURF	8.625	235		165 SX
TI	2.875	4669		

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: _____
Plug Co. License No.: _____ Plug Co. Name: _____
Proposal Rcvd. from: _____ Company: _____ Phone: _____

Proposed Plugging Method: Ordered 500 sx 60/40 pozmix 4% gel cement, 8 sx gel and 300 # hulls.
Perforations @ 4003'-4007', 4171'-4173', 4259'-4263', 4565'-4570'.
DV tool @ 2435' w/300 sx cement.

Plugging Proposal Received By: MARVIN MILLS
Date/Time Plugging Completed: 05/11/2012 2:00 PM

Witness Type: COMPLETE (100%)
KCC Agent: MARVIN MILLS

Actual Plugging Report:

Ran tubing to 4548'. Pumped 8 sx gel followed with 125 sx cement and 200 # hulls.
Pulled tubing to 2710'. Pumped 135 sx cement.
Pulled tubing to 1450'. Pumped 150 sx cement. Good circulation.
Pulled tubing out. Topped off with 15 sx cement.
Tied on back side. Squeezed with 10 sx cement. Shut in 450 psi.

Perfs:

Top	Bot	Thru	Comments
4565	4570		
4259	4263		
4171	4173		
4003	4007		


RECEIVED
MAY 18 2012
5-18-12
KCC WICHITA

Remarks: ALLIED CEMENT TICKET # 34480

Plugged through: TBG

District: 04

Signed

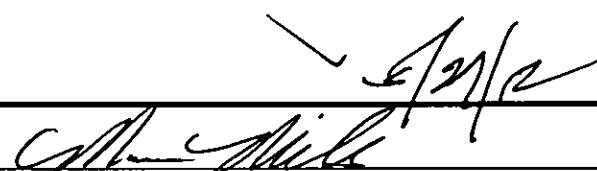

(TECHNICIAN)

CM