


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Commission
245 North Water
Wichita, KS 67202

FORM CP-4

WELL PLUGGING RECORD

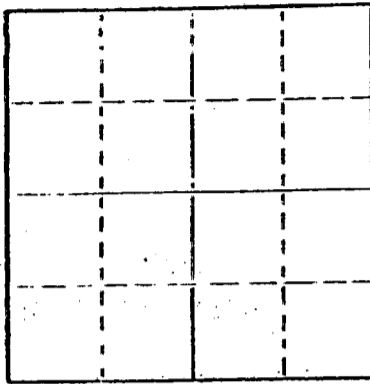

Locate well correctly on above
Section Plat

Pratt County. Sec. 31 Twp. 26 Rge. 12 ~~(E)~~ (W)
Location as "NE/CNW/SW" or footage from lines SE SW SW
Lease Owner Wayne L. Kirkman Oil Operations
Lease Name Honeman "A" Well No. 1
Office Address 434 North Market, Wichita, KS 67202
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 8-21 19 74
Plugging commenced _____ 8-21-74 19 74
Plugging completed _____ 10-04-74 19 74
Reason for abandonment of well or producing formation _____
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. Russell Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4319 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

462 Ft. 8 5/8 surface cemented with 300 sacks. 4319 ft. 5 1/2 long string cemented with 195 sacks. Top perf. 4211 ft. Sand to 4150 ft, 5 sacks cement with dump bailer. Pulled 3000 ft, 5 1/2. Pump 2 sacks hulls, 10 gel, 100 sacks cement to surface.
Pumped by Sun Cementing Great Bend, KS 67530

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Russ Casing Pulling Co., Inc.
Address _____

STATE OF _____ COUNTY OF _____ ss. _____
(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) _____

(Address) _____

SUBSCRIBED AND SWORN TO before me this _____ day of _____, 19____

My commission expires _____ Notary Public.

15-151-10652-000

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


COPY

Company- COOPERATIVE REFG. ASSOC.
Farm- Honeman "A" No. 1

SEC. 31 T. 26 R. 12W
SE SW SW

Total Depth. 4319
Comm. 3-13-52 Comp. 4-5-52
Shot or Treated.
Contractor. Company tools
Issued. 7-19-52

County Pratt KANSAS



Elevation. 1899

Production. BHB 907 BO & 2% wtr.

Figures indicate Bottom of Formations.

surface clay, sand & shale	400
shale & shell	462
red bed & sand shale	739
anhydrite	761
shale, sand & shell	1160
salt, shale & shell	1435
shale & shells	1750
shell, shale & lime	1915
lime & shale	2015
lime	2400
lime & shale	2590
lime	2775
lime & shale	2870
lime	3005
lime & shale	3020
lime	3130
shale & lime	3365
lime	3503
shale & lime	3565
lime, sand & shale	3620
shale & lime	3695
lime	3840
cherty lime	3877
lime	4015
lime, chert & shale	4077
cherty lime	4120
cherty lime & shale	4140
cherty lime	4180
chert & shale	4205
cherty lime	4210
coring	4280
shale & lime	4319 RTD
top of arbuckle	4316
Total Depth	

Tops:	
Lansing	3693
Miss. lime	4068
Kinderhook	4109
Viola	4118
Simpson Shale	4188
Simpson Sand	4221
Base of Sand	4266
Arbuckle	4312

RECEIVED
STATE CORPORATION COMMISSION
AUG 21 1974
CONSERVATION DIVISION
Wichita, Kansas