

STATE OF KANSAS STATE CORPORATION COMMISSION 200 Colorado Derby Bldg. Wichita, Kansas 67202


FEB 28 1983

CONSERVATION DIVISION Wichita, Kansas

WELL PLUGGING RECORD

Give All Information Completely Make Required Affidavit

COUNTY Ness SEC. 12 TWP. 17S RGE. 26 E/W Location as in quarters or footage from lines: 825' FNL, 1320' FWL NW 1/4

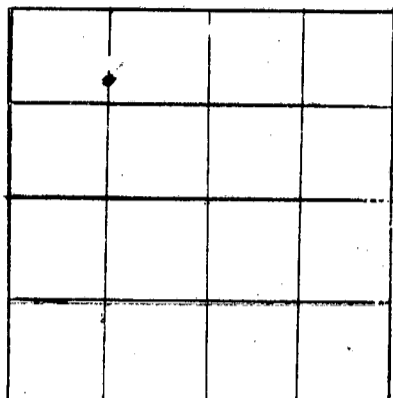

Locate Well correctly on above Section Plat.

Lease Owner Eagle Explorations, Inc. Lease Name Stutz Well No. #1 Office Address Suite 300, 107 N. Market Wichita, Kansas Character of Well (Completed as Oil, Gas or Dry Hole): Dry Hole Date Well Completed Application for plugging filed 2-22-83 Plugging commenced 2-19-83 Plugging completed 2-19-83 Reason for abandonment of well or producing formation

No Produceable Zones

Was permission obtained from the Conservation Division or it's Agent's before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Don Ubel

Producing formation None Depth to top bottom T.D.

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

Casing Record

Table with 7 columns: Formation, Content, From, To, Size, Put in, Pulled Out. Row 1: Surface, 8 5/8", 290, -0-


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Drilling Mud from T.D. to 1900' 1900' to 1774 50 Sacks Cement 1774' to 330' Drilling Mud 330' to 204' 50 Sacks Cement 204' to 40' Drilling Mud 40' to surface Wooden plug and 10 Sacks Cement 10 Sacks rat hole and 10 sacks mouse hole Used total of 130 sacks common cement + 2% gel, 3% CaCl2

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor

STATE OF KANSAS COUNTY OF SEDGWICK, ss. Carl Durr (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

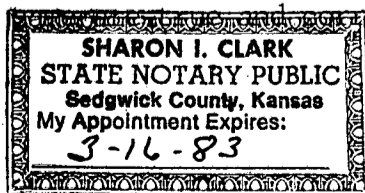

(Signature) Carl Durr Carl Durr Suite 300, 107 N. Market Wichita, Ks. (Address) 67202

SUBSCRIBED AND SWORN TO before me this 23rd day of February, 19 83

Sharon I. Clark Notary Public.

My Commission expires: March 16, 1983