

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-191-21280-00-00  
Spot: SESWSWSE Sec/Twnshp/Rge: 17-32S-2E  
330 feet from S Section Line, 2305 feet from E Section Line  
Lease Name: EVANS Well #: 4  
County: SUMNER Total Vertical Depth: 3712 feet

Operator License No.: 7186  
Op Name: DOCKING DEVELOPMENT COMPANY,  
Address: PO BOX 928  
ARKANSAS CITY, KS 67005

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	3708		150 SX
SURF	8.625	234		100 SX

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 05/23/2012 12:00 PM  
Plug Co. License No.: 3004 Plug Co. Name: GRESSEL OILFIELD SERVICE, LLC  
Proposal Rcvd. from: LARRY BARTELSON Company: DOCKING DEVELOPMENT Phone: (620) 455-3444

Proposed Plugging Method: CIBP ABOVE PERFS, CAP WITH 2 SKS. PERF 300' & CIRC CEMENT TO SURFACE.

Plugging Proposal Received By: STEVE VANGIESON Witness Type: NONE  
Date/Time Plugging Completed: 05/23/2012 12:00 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

A CIBP WAS SET AT 3320' & CAPPED WITH 2 SKS CEMENT. THE 4 1/2 WAS PERFORATED AT 300' WHERE CEMENT WAS CIRC TO SURFACE INSIDE THE 4 1/2 CASING & IN THE 4 1/2 ANNULAS.

RECEIVED  
JUN 08 2012  
KCC WICHITA

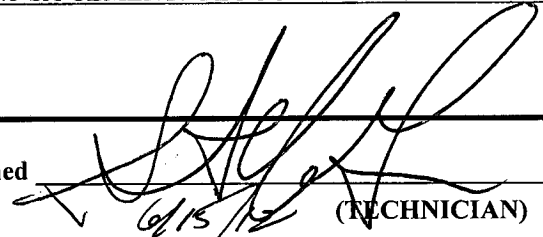
Perfs:

Top	Bot	Thru	Comments
3708	3712	OH	
3337	3345	CSG	

Remarks: COPELAND CEMENT TICKET #37923 145 SX CEMENT. PLUGGED DUE TO COMPLAINT.

Plugged through: TBG

District: 02

Signed  (TECHNICIAN)  
6/15/12

JK