

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-191-10239-00-01  
Spot: NENWNE Sec/Twnshp/Rge: 9-35S-3W  
330 feet from N Section Line, 1650 feet from E Section Line  
Lease Name: SCHMIDTZ Well #: 3-5  
County: SUMNER Total Vertical Depth: 4823 feet

Operator License No.: 34357  
Op Name: ATLAS OPERATING LLC  
Address: 15603 KUYKENDAHL, STE 200  
HOUSTON, TX 77090

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		4755		
PROD 7		4822		500 SX
SURF	10.75	614		450 SX

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 05/03/2012 3:00 PM

Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.

Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: \_\_\_\_\_

Proposed Plugging Method: SAND TO 4300' & 75 SKS CMT. CIRC CMT 660'-0'.

Plugging Proposal Received By: JEFF KLOCK

Witness Type: PARTIAL

Date/Time Plugging Completed: 05/03/2012 3:00 PM

KCC Agent: STEVE VANGIESON

Actual Plugging Report:

Perfs:

THE PERFS WERE COVERED WITH SAND TO 4287' & CAPPED WITH 7 SKS CMT. NO RECOVERY. SURFACE PIPE FLOWED OIL BACK. TIED ONTO 10 3/4 AND PUMPED 170 SKS CMT. RAN TUBING TO 660' & CIRCD CMT TO SURFACE. CUT PIPE OFF & TOPPED OF 7" WITH 25 SXS CMT & TOPPED OFF 10 3/4 WITH 35 SXS CMT.

Top	Bot	Thru	Comments
4789	4810	CSG	
4362	4365	CSG	

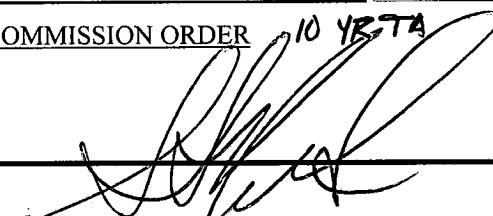
KCC WICHITA  
JUN 08 2012  
RECEIVED

Remarks: QUALITY WELL SERVICE 60/40 4% GEL. COMMISSION ORDER 10 YBTA

Plugged through: TBG

District: 02

Signed

  
6/14/12 (TECHNICIAN)

✓ JK