

TO:
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION - PLUGGING
 130 SOUTH MARKET, SUITE 2078
 WICHITA, KANSAS 67202

API Well Number: 15-191-00876-00-03
 Spot: NENWSW Sec/Twnshp/Rge: 3-35S-3W
2310 feet from S Section Line, 4320 feet from E Section Line
 Lease Name: HOBBISIEFKEN Well #: 2-3
 County: SUMNER Total Vertical Depth: 4823 feet

Operator License No.: 34357
 Op Name: ATLAS OPERATING LLC
 Address: 15603 KUYKENDAHL, STE 200
HOUSTON, TX 77090

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		4150		2 SX
CIBP		4385		1 SX
CIBP		4650		1 SX
CIBP		4792		
PROD 7		4752		500 SX
SURF 10.75		604		500 SX

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 04/26/2120 4:00 PM
 Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
 Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE Phone: _____

Proposed Plugging Method: SAND BACK TO 3635 & 7 SKS. REC PIPE, CIRC CMT FROM 650-0'.

Plugging Proposal Received By: JEFF KLOCK Witness Type: PARTIAL
 Date/Time Plugging Completed: 04/26/2012 4:00 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

SET CIBP AT 3593' & 7 SKS CMT. 10 3/4 ANNUAL FLOWED. TIED ONTO 10 3/4 & PUMPED 205 SX CMT. SI 400#. RAN 2 INCH TUBING TO 660' & CIRCD WITH 100 SKS CMT. TOPPED OF 10 3/4 WITH 10 SXS CMT & 30 SKS IN 7".

KCC WICHITA
 JUN 08 2012
 RECEIVED

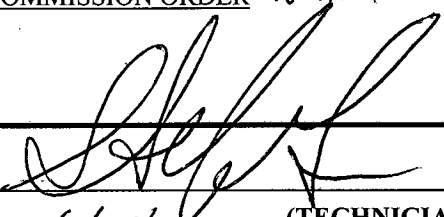
Perfs:

Top	Bot	Thru	Comments
4796	4804	CSG	
4736	4742	CSG	
4732	4734	CSG	
4321	4338	CSG	
3689	3695	CSG	

Remarks: QUALITY WELL SERVICE 60/40 4% GEL. COMMISSION ORDER 16 YR TB

Plugged through: TBG

District: 02

Signed: 
 6/14/12 (TECHNICIAN)