


15-135-19095-00-00

WELL PLUGGING RECORD

STATE OF KANSAS STATE CORPORATION COMMISSION Give All Information Completely Make Required Affidavit Mail or Deliver Report to: Conservation Division State Corporation Commission 211 No. Broadway Wichita, Kansas

Ness County. Sec. 31 Twp. 17S Rge. 24 (W)

Location as "NE/CNW/SW" or footage from lines NE NE Lease Owner Sunray DX Oil Company Lease Name Alex Rodie Well No. 1 Office Address P. O. Box 729, Great Bend, Kansas Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole Date well completed June 3 1963 Application for plugging filed June 4 1963 Application for plugging approved June 5 1963 Plugging commenced June 3 1963 Plugging completed June 3 1963 Reason for abandonment of well or producing formation No commercial oil found If a producing well is abandoned, date of last production 19 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

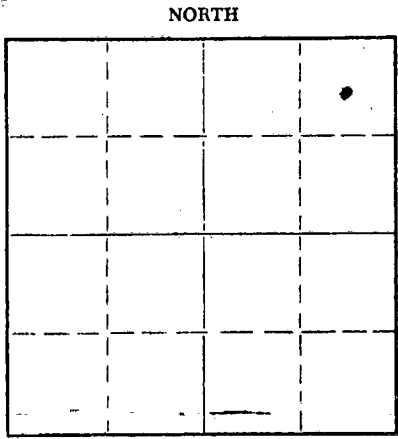

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas Producing formation Depth to top Bottom Total Depth of Well 1515 Feet Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Table with 7 columns: FORMATION, CONTENT, FROM, TO, SIZE, PUT IN, PULLED OUT. Row 1: SIZE 8-5/8", PUT IN 296', PULLED OUT None.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Lone Star Portland Cement Plugs were set at:

- 660'-595' - 20 sacks
240'-179' - 20 sacks
30' to surface 10 sacks

All intervals between cement plugs are filled with 9.7# mud laden fluid.

RECEIVED STATE CORPORATION COMMISSION JUN 13 1963 06-13-1963 CONSERVATION DIVISION Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Stickle Drilling Company Address Tulsa, Oklahoma

STATE OF KANSAS, COUNTY OF BARTON, ss. C. C. SHREVE (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. C. Shreve, District Manager P. O. Box 729, Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 12th day of June, 1963 My commission expires February 22, 1967



D. L. Jackson Notary Public.

15-135-19095-00-00

Sunray DX Oil Company
Tulsa, Oklahoma

Tulsa, Oklahoma
June 7, 1963

Contractor: Stickle Drilling Company
Date Commenced: May 24, 1963
Date Completed: June 2, 1963

Alex Rodie No. 1
NE NE Sec. 31-17S-24W
Ness County, Kansas

DRILLER'S LOG

Depth Figures Indicate Base of Formation:

Post rock and shale	297
Shale	445
Shale and sand	1475
Shale	2496
Shale and lime	3026
Lime and shale	3953
Lime and chert streaks	4015
Lime	4235
Lime and shale	4379
Lime and chert	4487
Lime	4545 TD

I, Fred E. Stickle, hereby certify the above to be a true and complete Driller's Log of Sunray DX Oil Company's Alex Rodie No. 1 Well, NE NE Section 31-17S-24W, Ness County, Kansas.

Fred E. Stickle
FRED E. STICKLE

W. Mensley
Notary Public

My Commission Expires January 11, 1967

RECEIVED
STATE CORPORATION COMMISSION
JUN 13 1963
06-13-1963
CONSERVATION DIVISION
WICHITA, KANSAS