


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Ellis County, Sec. 31 Twp. 11S Rge. (X) 18 (W)

Location as "NE/CNW/SE" or footage from lines SE NE SE
Lease Owner R. P. Nixon Operations
Lease Name Desmarteau Well No. 1
Office Address Box 589, Russell, KS 67665
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed 2-8 1976
Application for plugging filed 2-8 1976
Application for plugging approved 2-8 1976
Plugging commenced 2-8 1976
Plugging completed 2-8 1976
Reason for abandonment of well or producing formation Dry hole

NORTH

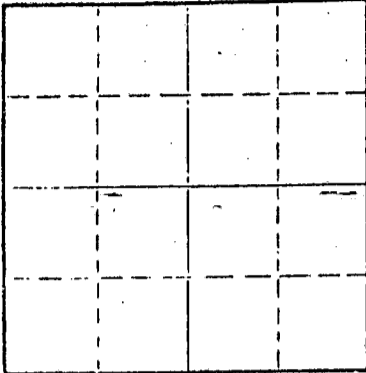

Locate well correctly on above Section Plot

If a producing well is abandoned, date of last production None 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Duane Rankin
Producing formation Depth to top Bottom Total Depth of Well 3662 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	190	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole w/heavy mud, set plug & pumped 50 sks cement through drill pipe @ 500'. Plus & 25 sks through pipe @ 185'. Bridge hole @ 40' & spotted 10 sks through drill pipe.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Emphasis Oil Operations
Address Box 506, Russell, KS 67665

STATE OF Kansas COUNTY OF Russell, ss.


Joe K. Branum (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Joe K. Branum
Box 506, Russell, KS 67665
(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of February, 1976

My commission expires October 2, 1979.

Notary Public.



RECEIVED
STATE CORPORATION COMMISSION

FEB 12 1976

CONSERVATION DIVISION
Wichita, Kansas

EMPHASIS OIL OPERATIONS
P. O. Box 506
Russell, Kansas 67665

DRILLERS LOG

OPERATOR: R. P. Nixon Operations
Box 589
Russell, Kansas 67665

CONTRACTOR: Emphasis Oil Operations
Box 506
Russell, Kansas 67665

LEASE: Desmarteau WELL: #1

LOCATION: SE NE SE
Section 31-11S-18W
Ellis County, Kansas

Total Depth: 3662'
Commenced: 1-30-76
Casing: 8-5/8" @ 190'

Elevation:
Completed: 2-8-76
Status: Dry Hole

RECEIVED
STATE CORPORATION COMMISSION
FEB 12 1976

CONSERVATION DIVISION
Wichita, Kansas

DEPTHS & FORMATIONS

(All measurements from K.B.)

Rock & Clay	60	Shale & Lime	2064
Shale	233	Lime & Shale	3315
Shale & Shells	756	Lime	3466
Sand	1100	Lime & Shale	3580
Shale & Red Bed	1415	Lime	3590
Anhydrite	1452	Lime & Shale	3660
Shale & Shells	1835	Lime (R.T.D.)	3662

STATE OF KANSAS)
COUNTY OF RUSSELL) ss

I, Joe K. Branum, of Emphasis Oil Operations, state that the above and foregoing is a true and correct log of the above captioned well.

Joe K. Branum

Joe K. Branum

Subscribed and sworn to before me this 8th day of February, 1976.
My commission expires: October 2, 1979.

Patricia L. Clark

Notary Public

