


STATE OF KANSAS
 STATE CORPORATION COMMISSION
 Give All Information Completely
 Make Required Affidavit
 Mail or Deliver Report to:
 Conservation Division
 State Corporation Commission
 212 No. Market
 Wichita, Kansas

WELL PLUGGING RECORD

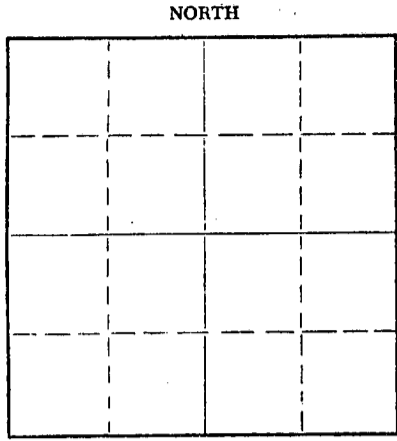

Locate well correctly on above Section Plat

Ness County. Sec. 2 Twp. 17S Rge. 24W (E) (W)
 Location as "NE/CNW/SW" or footage from lines SW SE
 Lease Owner Pickrell Drilling Company
 Lease Name Hall "J" Well No. 1
 Office Address 705 4th National Bank Building, Wichita, Kansas
 Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
 Date well completed Sept. 20, 1968 19
 Application for plugging filed Sept. 20, 1968 19
 Application for plugging approved Sept. 20, 1968 19
 Plugging commenced Sept. 20, 1968 19
 Plugging completed Sept. 20, 1968 19
 Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey Box 582 Hays, Kansas
 Producing formation Depth to top Bottom Total Depth of Well 4500 Feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	245'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.


Bottom plug @ 900' with 70 sacks Middle plug @ 240' with 20 sacks, Top @ 40' with 10 sacks. Comp.

RECEIVED
 STATE CORPORATION COMMISSION
 SEP 30 1968
 CONSERVATION DIVISION
 Wichita, Kansas
 09-30-1968

(If additional description is necessary, use BACK of this sheet)
 Name of Plugging Contractor Pickrell Drilling Company
 Address 705 4th National Bank Building, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
 (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. W. Sebitts
 705 4th National Bank Building, Wichita, Kansas (Address) 68



Subscribed and sworn to before me this 25th day of September, 1968

L. M. Whiting
 Notary Public.

My commission expires May 10, 1970

ROTARY DRILLING LOG

COMPANY: PICKRELL DRILLING COMPANY
705 4th National Bank Building
Wichita, Kansas
LOCATION: Hall "J" No. 1
SW SE Sec. 2-17S-24W, Ness Co., Kansas

Rotary Drilling Commenced 9-11-68
Rotary Drilling Completed 9-20-68

CONTRACTOR: **PICKRELL DRILLING COMPANY**
Wichita, Kansas

CASING RECORD: 6 jts used 20# 8 5/8" casing set @ 244' KB. 155 sacks cement.
Circ.
Bottom plug @ 900' with 70 sacks, Middle plug @ 1240' with 20 sacks
Top @ 40' with 10 sacks. Comp.

LOG

(Figures indicate bottom of formation — measurements from top of rotary bushing.)

130	Clay & Post Rock	C. F. S.
215	Shale & Shells	4488
245	Cement	4500
1167	Shale	
1198	Blaine	
1310	Shaled sand	
1810	Shale	
1858	Anhydrite	
2425	Shale	Slope Test
2730	Shale & Lime	2000
2880	Lime	2500
3497	Shale & Lime	3000
3765	Shale	3500
4080	Shale & Lime	4000
4270	Lime	
4473	Lime & Shale	
4488	Lime Shale and sand	S. L. M
4500	TD	

Strap 4473
Difference 1.72 long

RECEIVED
STATE CORPORATION COMMISSION
SEP 30 1968
CONSERVATION DIVISION
Wichita, Kansas


09-30-1968

The undersigned, C. W. SEBITS, Attorney-in-Fact for PICKRELL DRILLING COMPANY, hereby certifies in behalf of said Company, that the above is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

PICKRELL DRILLING COMPANY
By [Signature]
Attorney-in-Fact
C. W. SEBITS

STATE OF KANSAS }
COUNTY OF SEDGWICK } ss.:

25th day of September, 1968, before me the undersigned, a Notary Public, in and for the County and State aforesaid, personally appeared C. W. Sebitts, to me known to be the Attorney-in-Fact person who subscribed the name of PICKRELL DRILLING COMPANY to the foregoing instrument as its Attorney-in-Fact and acknowledged to me that he executed the same as his free and voluntary act and deed, and as the free and voluntary act and deed of such company, for the uses and purposes therein set forth.
Given under my hand and seal of office the day and year last above written.



My commission expires: May 10, 1970

[Signature]
L. M. Whiting
Notary Public