

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Ness County, Sec. 32 Twp. 18 Rge. 24 (E) (W) x

Location as "NE/CNW%SW%" or footage from lines C of NW SW
Lease Owner McClure Oil Co.
Lease Name Doebbeling Well No. #1
Office Address 1301 Wichita Plaza, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed _____ 19____
Application for plugging filed 10-14-66 19____
Application for plugging approved _____ 19____
Plugging commenced 10-18-66 19____
Plugging completed 10-23-66 19____
Reason for abandonment of well or producing formation _____

NORTH

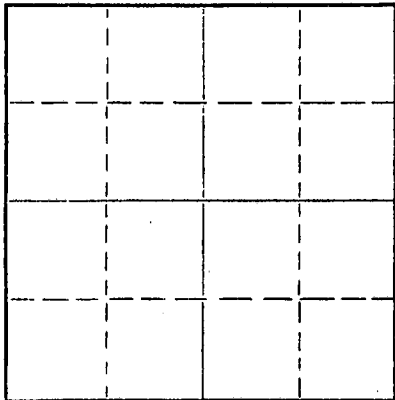

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4470' Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Made bottom hole plug back with sand to 4390', mixed and ran 3 sacks cement thru dump bailer.
Circulated hole with 15 sacks gel at 510'. Pulled 3 joints. Spotted 40 sacks cement thru 4 1/2" casing at 515'. Pulled 8 joints and spotted 25 sacks cement thru 4 1/2" casing at 255'. Pulled 8 joints.
Mudded hole to 40', set 10' rock bridge. Mixed and dumped 10 sacks cement to base of cellar.

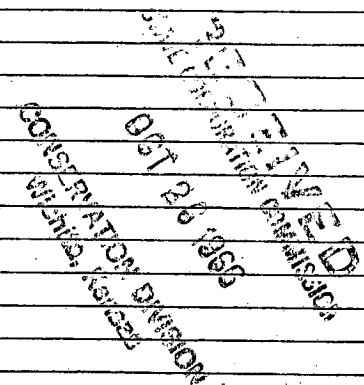

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co., Inc.
Address Box 364, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Southwest Casing Pulling Co., Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.
Box 364, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 25 day of October, 19 66

My commission expires 24 October 1968
Sidney D Miller
Notary Public.

15-135-30259-0000

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG


DOEBBELING #1
C NW SW SECTION 32-18S-24W
NESS COUNTY, KANSAS

COMMENCED: MARCH 26, 1966
COMPLETED: APRIL 6, 1966

OPERATOR - McCLURE OIL COMPANY

DEPTH		FORMATION	REMARKS
FROM	TO		
0	250	SHALE	RAN 10 JOINTS OF 8-5/8" CASING, SET @ 250' w/175 SACKS CEMENT.
250	780	SHALE	
780	835	SAND	
835	1115	SHALE AND RED BED	
1115	1315	SAND	
1315	1450	SHALE AND RED BED	
1450	1652	SHALE	
1652	1685	ANHYDRITE	
1685	1935	SHALE	
1935	2650	SHALE AND LIME	
2650	2760	LIME	
2760	3670	LIME AND SHALE	
3670	4392	LIME	
4392	4410	LIME AND CHERT	
4410	4470	LIME	
4470	TD		RAN 138 JOINTS OF 4 1/2" CASING, @ 4469' w/125 SACKS CEMENT.

I, E. E. HALL, CERTIFY THIS IS A CORRECT COPY OF THE DRILLERS' LOG FOR THE WELL DRILLED IN THE C NW SW SECTION 32-18S-24W, NESS COUNTY, KANSAS, TO THE BEST OF MY KNOWLEDGE AND BELIEF.




E. E. HALL

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

BEFORE ME, THE UNDERSIGNED, A NOTARY PUBLIC WITHIN AND FOR SAID COUNTY AND STATE, ON THIS 7TH DAY OF APRIL, 1966, PERSONALLY APPEARED E. E. HALL, TO ME PERSONALLY KNOWN TO BE THE IDENTICAL PERSON WHO EXECUTED THE WITHIN AND FOREGOING INSTRUMENT AND ACKNOWLEDGED TO ME THAT HE EXECUTED THE SAME AS HIS FREE AND VOLUNTARY ACT AND DEED FOR THE USES AND PURPOSES THEREIN SET FORTH.

IN WITNESS WHEREOF, I HAVE HEREUNTO SET MY HAND AND OFFICIAL SEAL THE DAY AND YEAR LAST ABOVE WRITTEN.


BARBARA J. LAYTON, NOTARY PUBLIC

My Commission Expires February 1, 1968.