


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

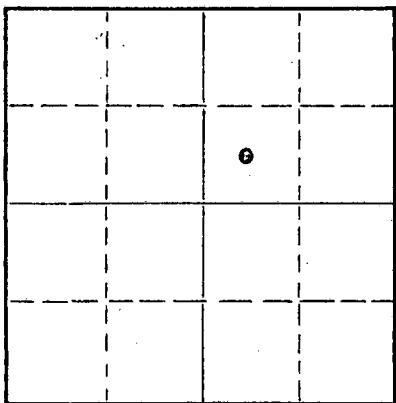

Locate well correctly on above
Section Plat

Ness County. Sec. 24 Twp. 19 Rge. (E) 23 (W)
Location as "NE/CNW/SW" or footage from lines C SW NE
Lease Owner Colorado Oil and Gas Corporation
Lease Name Merten Well No. 1
Office Address P. O. Box 999, Liberal, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 12-22 19 60
Application for plugging filed 12-22 19 60
Application for plugging approved 12-22 19 60
Plugging commenced 12-22 9 AM 19 60
Plugging completed 12-22 19 60
Reason for abandonment of well or producing formation Non Commercial

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert P. Leiker
Producing formation Mississippi Depth to top _____ Bottom _____ Total Depth of Well 4392 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Sands	Water	168	260	8 5/8	293	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud to bottom of surface pipe. Set wooden plug 293 to 291 with 20 sacks cement on top. Heavy mud to 35' set wooden plug at 35' to 33' capped plug with cement to bottom of cellar or 3' below ground level.

DEC 23 1960
12-23-1960
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor S & S Drilling Company
Address Great Bend, Kansas

STATE OF Kansas, COUNTY OF Seward, ss.
A. J. Smith (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) A. J. Smith

(Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of December

My commission expires 11-1-62

William B. Claunch
Notary Public.



15-135-00658-0000

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


Company. COLORADO OIL & GAS
Farm. Merten No. 1

SEC. 24 T. 19 R.23W
C SW NE

Total Depth. 4400'
Comm. 12-1-60 Comp. 12-15-60
Shot or Treated.
Contractor. S & S Drig.
Issued. 2-24-62

County Ness

KANSAS



8" CASING:
293'

Elevation. 2217' DF

Production. Dry

Figures Indicate Bottom of Formations.

clay	20
shale & shells	280
lime	294
shale, shells, red bed	850
shale, shells, sand	1075
shale, shells, red bed	1460
shale & shells	1488
Anhydrite	1535
shale & shells	1705
shale & lime	2240
lime	2475
shale & lime	2595
lime & shale	2685
lime	2750
lime & shale	2840
chalky lime	2915
shale & lime	2956
lime & shale	3545
shale & lime	3630
lime & shale	3775
lime	4215
lime & shale	4285
lime	4352
Mississippi	4360
lime - chert	4400
Total Depth	

TOPS: SCOUT	
Base Blaine	854
Cimarron Anhydrite	1488
Wabaunsee	3185
Lansing	3726
Cherokee	4237
Mississippi	4344
Osage	4368