

15-135-20773-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

NESS County, Sec. 22 Twp. 19 Rge. (E) 25 (W)

Location as "NE/CNWSWK" or footage from lines C NW NW  
Lease Owner DELTA WESTERN COMPANY  
Lease Name DINGES Well No. 1  
Office Address 806 First National Center, Oklahoma City, Okla. 73102  
Character of Well (completed as Oil, Gas or Dry Hole) DRY HOLE  
Date well completed 6/29 1973  
Application for plugging filed 6/29 1973  
Application for plugging approved 6/29 1973  
Plugging commenced 6/29 1973  
Plugging completed 6/29 1973  
Reason for abandonment of well or producing formation DRY HOLE

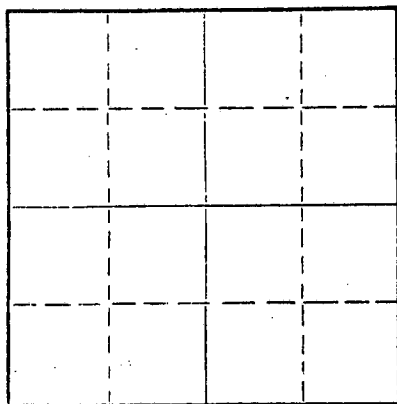

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well LEO MASSEY  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4560 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Shale-post rock		0	391	8 5/8	391	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

1st Plug @ 720 w/70 sx  
2nd Plug @ 240' w/20 sx  
Plug and bridge to hold Kelly @ 40' w/10 sx  
Plugged by Halliburton

RECEIVED  
STATE CORPORATION COMMISSION


JUL 6 1973 07-06-1973

CONSERVATION DIVISION  
Wichita, Kansas

Name of Plugging Contractor GABBERT-JONES, INC.  
Address 830 Sutton Place, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, SS.  
GABBERT JONES, INC. (employee of owner) or (owner/operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack W. Gabbert, 830 Sutton Place, Wichita, Ks. 67202



5 day of July 73, 19  
Marjorie Hall  
Notary Public.

My commission expires Nov. 29, 1973

15-135-20773-00-00

GABBERT-JONES, INC.  
WICHITA, KANSAS  
DRILLERS' WELL LOG


DINGES #1  
C NW NW  
Section 22-19S-25W  
Ness County, Kansas

Commenced: June 21, 1973  
Completed: June 29, 1973

OPERATOR: DELTA WESTERN COMPANY

Depth From	Depth To	Formation	Remarks
0	395	Shale-Post rock	Ran 9 jts of used 28# double jts 8 5/8" csg. set @ 391' cemented w/225 sks common 3% CC 2% Gel P.D. 5:30 PM 6/21/1973 Cement Circ.
395	450	Shale-shells	
450	555	Sand	
555	900	Shale-shells	
900	1200	Shale-redbed	
1200	1420	Sand	
1420	1726	Shale	
1726	1765	Anhydrite	
1765	1960	Shale	
1960	2075	Shale-redbed	
2075	2275	Shale-lime stks	
2275	2630	Lime-shale	
2630	2760	Lime	
2760	2900	Lime-shale	
2900	3235	Lime	
3235	3400	Shale-lime	
3400	3545	Lime-shale	
3545	3750	Shale-lime	
3750	3910	Lime-shale	
3910	4045	Lime-shale stks	
4045	4345	Lime	
4345	4415	Lime-shale	
4415	4560	Lime	
4560	TD		DRY AND ABANDONED


I, James S. Sutton, II, certify this is a correct copy of the Drillers' Log for the well drilled in the C NW NW, Section 22-19S-25W, Ness County, Kansas, to the best of my knowledge and belief.

  
James S. Sutton, II

STATE OF KANSAS )  
 ) SS  
COUNTY OF SEDGWICK )

Before me, the undersigned, a Notary Public within and for said County and State, on this 5th day of July, 1973, personally appeared James S. Sutton, II, to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.



RECEIVED  
STATE CORPORATION COMMISSION  
07-06-1973  
JUL 6 1973

  
Marjorie Hall, Notary Public

CONSERVATION DIVISION  
Wichita, Kansas