

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-065-23839-00-00
Spot: SENWSWNW Sec/Twnshp/Rge: 1-10S-23W
1800 feet from N Section Line, 500 feet from W Section Line
Lease Name: GRIFFITH Well #: 1-1
County: GRAHAM Total Vertical Depth: 4172 feet

Operator License No.: 8914
Op Name: H & C OIL OPERATING INC.
Address: PO BOX 86
PLAINVILLE, KS 67663

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	224		140 sx

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 07/11/2012 12:00 AM
Plug Co. License No.: 33493 Plug Co. Name: AMERICAN EAGLE DRILLING LLC
Proposal Rcvd. from: BRAD Company: AMERICAN EAGLE DRILLING LLC Phone: (785) 302-0476

Proposed Plugging Method: Ordered 230 sx 60/40 pozmix - 4% gel cement with 1/4# flo- seal per sack.
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: DAVID WANN Witness Type: NONE
Date/Time Plugging Completed: 07/11/2012 4:00 AM KCC Agent: DAVID WANN

Actual Plugging Report:

1st plug @2000 w/25 sx
2nd plug @1150 w/100 sx
3rd plug @275 w/40 sx
4th plug @40 w/10 sx

Rathole 30 sx

Perfs:

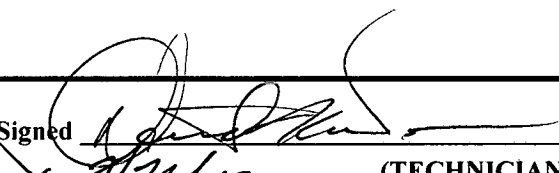
RECEIVED
JUL 16 2012
KCC WICHITA

Remarks: QUALITY OILWELL

Plugged through: DP

District: 04

Signed


7/24/12
(TECHNICIAN)

CM

JUL 11 2012