


15-135-21888-0000

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

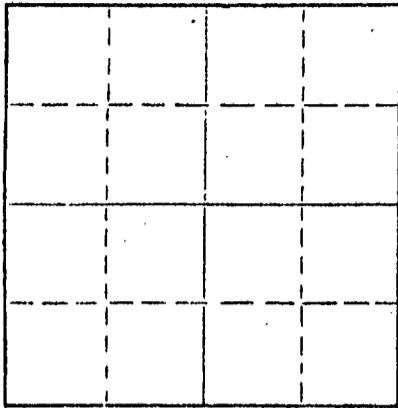

Locate well correctly on above
Section Plat

Ness County, Sec. 35 Twp. 19S Rge. (E) 24W (W)
Location as "NE/CNWKSWK" or footage from lines 440' FSL & 990' FEL of SE/4
Lease Owner Chief Drilling Co., Inc.
Lease Name P. Lundy Well No. 1
Office Address 905 Century Plaza, Wichita, Ks. 67202
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed Oct. 28, 1980 19
Application for plugging filed Oct. 28, 1980 19
Application for plugging approved Oct. 28, 1980 19
Plugging commenced Oct. 28, 1980 19
Plugging completed Oct. 28, 1980 19
Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well
Producing formation Depth to top Bottom Total Depth of Well 4431' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	517'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged w/70 sx. @ 860', w/25 sx. @ 510', & 10 sx. @ 40'.

RECEIVED
STATE CORPORATION COMMISSION

NOV - 7 1980

CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor Warrior Drilling, Inc. (If additional description is necessary, use BACK of this sheet)
Address 905 Century Plaza, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Bill G. Lahar (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bill G. Lahar
905 Century Plaza, Wichita, Ks. 67202
(Address)

Subscribed and sworn to before me this 6th day of November, 19 80

Marilyn Lahar
Marilyn Lahar Notary Public.

My commission expires

MARILYN LAHAR
NOTARY PUBLIC
STATE OF KANSAS
MY APPT. EXP. 4-30-83

15-135-21888-0000
WELL LOG

CHIEF DRILLING CO., INC.
905 Century Plaza
Wichita, Kansas 67202

#1 P. LUNDY
440' FLS & 990' FEL of SE/4
Sec. 35-19S-24W
Ness County, Kansas
COMMENCED: Oct. 19, 1980
COMPLETED: Oct. 28, 1980

CONTRACTOR: Warrior Drilling, Inc.
CASING RECORD: 8 5/8" @ 517' w/250 sx.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>ELEVATIONS</u>
Surface Clay & Sand	0	524	2316 Gr.
Shale	524	1045	2318 D.F.
Sand	1045	1266	2321 K.B.
Shale	1266	1588	
Anhydrite	1588	1602	
Shale	1602	2622	
Shale & Lime	2622	2993	
Lime & Shale	2993	3965	
Lime	3965	4431	
RTD	4431		

D & A

STATE OF KANSAS, COUNTY OF SEDGWICK) ss:

I hereby certify that the above is a true and correct copy of the
Driller's Log of the well drilled in the SE/4 Sec. 35-19S-24W,
Ness County, Kansas, to the best
of my knowledge and belief.

RECEIVED
STATE CORPORATION COMMISSION
NOV - 7 1980
CHIEF DRILLING CO., INC.
CONSERVATION DIVISION
Wichita, Kansas
Bill G. Lahar
Bill G. Lahar, Vice President

Subscribed and sworn to before me this 6th day of November, 1980.

MARILYN LAHAR
NOTARY PUBLIC
MAY APPT. EXT. 4-30-83

Marilyn Lahar
Notary Public