

STATE OF KANSAS  
STATE CORPORATION COMMISSION


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

WELL PLUGGING RECORD

Harper County, Sec. 29 Twp. 32S Rge. 7W (E) (W)

Location as "NE/CNW/SW" or footage from lines SW SW SE  
Lease Owner Beardmore Drilling Company  
Lease Name Berg Well No. 1  
Office Address 603 Petroleum Building, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Oil Well  
Date well completed February 14 19 54  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced September 16 19 54  
Plugging completed September 20 19 54  
Reason for abandonment of well or producing formation

NORTH

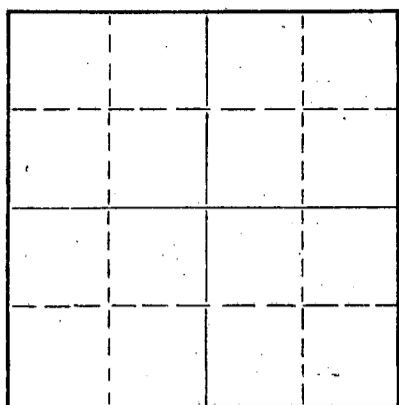

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Reul Durkee  
Producing formation Depth to top Bottom Total Depth of Well 4983 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE   | PUT IN | PULLED OUT |
|-----------|---------|------|----|--------|--------|------------|
|           |         |      |    | 8-5/8" | 180'   | None       |
|           |         |      |    | 5-1/2" | 4794'  | 4009       |
|           |         |      |    |        |        |            |
|           |         |      |    |        |        |            |
|           |         |      |    |        |        |            |
|           |         |      |    |        |        |            |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Hole was plugged back from total depth of 4983' to 4419' and casing was perforated from 4396' to 4400'. Filled hole with sand from 4419' to 4390' and ran 6 sacks of cement. Mudded the hole to 185', set a 10' rock bridge and ran 15 sacks of cement at 175'. Mudded the hole to the top and ran 5 sacks of cement on top. Plugging completed.

RECEIVED  
STATE CORPORATION COMMISSION  
SEP 29 1954  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor West Supply Co., Inc.  
Address Chase, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK, ss.  
Heber Beardmore, Jr. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Heber Beardmore, Jr.  
603 Petroleum Bldg., Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 27th day of September 19 54  
Leonard P. Tolle  
Notary Public.

My commission expires January 28, 1956

PLUGGING  
FILE SEC 29 T 32 R 7W  
BOOK PAGE 62 LINE 14

BERG NO. 1

Drilled for: Beardmore and Sutton  
 Drilled by: Beardmore Drilling Co.

SW SW SE  
 Section 29-32S-7W  
 Harper County, Kansas

**Casing record:**

8-5/8" 180' w/110 Sacks  
 5-1/2" 4794 w/125 Sacks

Drilling Commenced: January 26, 1954  
 Drilling Completed: February 14, 1954

Elevation: KB 1369  
 DF 1366

| <u>FORMATION</u>  | <u>DEPTH</u> |
|-------------------|--------------|
| Cellar.           | 5            |
| Sand-             | 35           |
| Red Bed and Shale | 165          |
| Red Rock          | 182          |
| Red Bed -- Shale  | 570          |
| Shale - Shells    | 995          |
| Anhydrite         | 1010         |
| Shale-Shells      | 1320         |
| Shale - Lime      | 1540         |
| Lime - Shale      | 2355         |
| Shale - Lime      | 2755         |
| Lime - Shale      | 3515         |
| Lime-Shale-Sand   | 3665         |
| Lime-Shale        | 3880         |
| Lime              | 4060         |
| Lime-Shale        | 4412         |
| Lime Chert        | 4412         |
| Lime              | 4465         |
| Lime-Chert        | 4535         |
| Lime              | 4630         |
| Lime-Chert        | 4660         |
| Lime-Shale        | 4700         |
| Shale-Lime        | 4755         |
| Lime              | 4802         |
| Lime-Shale        | 4830         |
| Shale - Sand      | 4860         |
| Sand              | 4875         |
| Sand--Shale       | 4890         |
| Lime-Shale        | 4925         |
| Sand-Shale        | 4945         |
| Lime              | 4983 T.D.    |

TOPS:

|                   |      |
|-------------------|------|
| Topeka            | 2840 |
| Heebner           | 3235 |
| Douglas           | 3361 |
| Stalnaker         | 3617 |
| Base of Stalnaker | 3678 |
| Kansas City       | 3842 |
| Mississippi       | 4396 |
| Viola             | 4735 |
| Simpson Shale     | 4821 |
| Simpson Sand      | 4826 |
| Arbuckle          | 4955 |

**RECEIVED**  
 CORPORATION COMMISSION  
 SEP - 8 1954  
 CONSERVATION DIVISION  
 Wichita, Kansas

DST No. 1 - 4397 - 4412 - Open 1 hour shut in 15 minutes. Recovered 60' slightly gas cut mud. BHP 1300#.  
 DST No. 2 - 4414 - 4451 - Open 1 hour, shut in 20 minutes. Gas to surface in 5 minutes. Gauged at 450,000. Recovered 120' gas cut mud. BHP 1900.  
 DST No. 3 - 4756 - 4764 - Open 1 hour, shut in 20 minutes. Gas to surface in 8 minutes. Decreased to steady blow. Recovered 2000 feet fluid all oil except last 350' which is heavily gassed gassy muddy oil. BHP 1460.

**PLUGGING**  
 FILE SEC 29 T 32 R 2W  
 BOOK PAGE 62 LINE 14

STATE OF KANSAS  
COUNTY OF SEDGWICK <sup>SS</sup>

I, the undersigned, being duly sworn on oath state that the above and within statement is a true and correct record and log of the well drilled on the location above-described, to the best of my knowledge and belief.

Her Beadman

Subscribed and sworn to before me this 4th day of March, 1954.

Jaife English  
Notary Public

My Commission Expires:  
November 1, 1957



RECEIVED  
STATE CONSERVATION COMMISSION  
SEP 2 1954  
CONSERVATION DIVISION  
Wichita, Kansas