

15-051-01173-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


OR
FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging of formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission,
800 Bittling Building
Wichita, Kansas

Ellis County. Sec. 14 Twp 11 Rge. (E) 18 (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines NE NE SW
Lease Owner Central Petroleum Company, Inc.
Lease Name Lynn Well No. 1
Office Address P. O. Box 1288, Tulsa, Oklahoma
Character of Well (Completed as Oil, Gas or Dry Hole) dry hole
Date, well completed April 20, 1940 193
Application for plugging filed April 23, 1940 193
Application for plugging approved April 23, 1940 193
Plugging Commenced April 23, 1940 193
Plugging Completed April 23, 1940 193
Reason for abandonment of well or producing formation dry



Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 193
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well C. T. Alexander
Producing formation Siliceous Depth to top Bottom Total Depth of Well 3474 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	1163'	
				12"	155'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mud from 3474 to 1163 and bridge set at 1163' and a 15 ft. cement plug set on bridge and mud to bottom of cellar, cement to top of surface pipe at bottom of cellar.

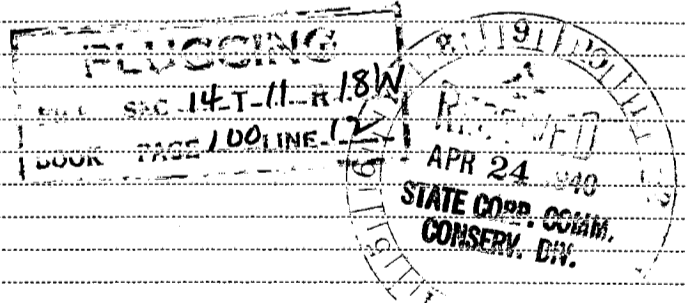

(If additional description is necessary use BACK of this sheet)

Correspondence regarding this well should be addressed to Central Petroleum Company, Inc.
Address P. O. Box 1288, Tulsa, Oklahoma.

STATE OF Kansas, COUNTY OF Sedgwick, ss.
H. C. BENNETT, Vice-President of The Okan/ Drilling Company, Inc. (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. THE OKAN DRILLING COMPANY, INC.

(Signature) H. C. Bennett
Vice-President.
600 Ellis-Singleton Bldg., Wichita, Kansas.
(Address)

SUBSCRIBED AND SWORN to before me this 24th day of April, 1940.

My commission expires December 19, 1942.

Ruth Maxwell
Notary Public.

CENTRAL PETROLEUM CO., INC.
Lynn No. 1

NE NE SW
Sec. 14 Twp. 11 Rge. 18 W.
County - Ellis

Commenced - 4/3/40
Completed - 4/20/40
Treated - no
Contractor - Okan Drilling Co. Inc.

Elevation - 1876
Production - dry & abnd.
Total Depth - 3474

CASING: 1163' 8 5/8"
155' 12"

surface	30	lime	3220
shale	90	lime and shale	3261
water gravel	120	shale & lime	3301
brown shale	140	lime	3355
gravel	155	lime	3394
brown lime & shale	250	conglomerate	3400
shale & shells	460	conglomerate	3407
red shale & lime	535	conglomerate	3427
iron	550	conglomerate	3446
lime and iron	600	conglomerate	3463
shale and lime	663	core	3474
sand	835		
shale	915	Total Depth.	
shale & shells	1045		
sticky shale & lime	1127		
shale	1165		
shale	1155		
lime hard	1160		
hard sand	1165		
sand	1195		
sand & shale	1210		
shale & lime	1410		
shale, lime shells & sand	1660		
sand and lime	1800		
lime	1840		
lime and shale	1908		
shale & lime	1942		
sand	1954		
shale & lime	2050		
lime	2120		
gummy shale & lime	2178		
lime and shale	2200		
lime and sand	2255		
sandy lime	2265		
shale	2288		
shale & lime	2365		
shale & shells	2415		
lime and shale	2505		
shale & lime	2580		
lime and shale	2660		
shale & lime	2730		
lime and shale	2800		
lime w/ shale brks.	2846		
lime w/ shale brks.	2894		
broken lime	2956		
lime hard	2992		
lime	3012		
bkn. lime	3018		
lime	3030		
bkn. lime	3040		
lime	3070		
lime	3116		
lime	3180		

14 11 18W
100 12

Apr 21 1940
3:00 PM
WELL LOG

STATE OF KANSAS)
) SS:
SEDGWICK COUNTY)

HENRY C. BENNETT of lawful age being first duly sworn upon oath states that he is Vice-President of The Okan Drilling Company, Inc.; that the attached well records are true, correct, and complete according to the records of this office and to the best of his knowledge and belief.

Dated this 24th day of April, A.D., 1940.

H. Bennett

SUBSCRIBED and sworn to before me this 24th day of April, A.D., 1940.



Ruth Maxwell
Notary Public

My Commission Expires:
December 19, 1942.

14 11 18W
100 12

