

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-135-21975-00-00
Spot: SESESE Sec/Twnshp/Rge: 5-17S-23W
330 feet from S Section Line, 330 feet from E Section Line
Lease/Unit Name: HARKNESS D Well Number: 3
County: NESS Total Vertical Depth: 4870 feet

Operator License No.: 30606
Op Name: MURFIN DRILLING CO., INC.
Address: 250 N. WATER, STE 300
WICHITA, KS 67202

Production Casing Size: 5.5 feet: 4663 WITH 115 SX CMT
Surface Casing Size: 8.625 feet: 262 WITH 175 SX CMT

Well Type: OIL UIC Docket No: Date/Time to Plug: 07/15/2003 3:20 PM
Plug Co. License No.: 32382 Plug Co. Name: SWIFT SERVICES, INC.
Proposal Rcvd. from: JOH GERSTNER Company: MURFIN DRILLING Phone: (785) 421-2103

Proposed Plugging Method: SHOOT OFF TUBING AT 3700'. 1ST PLUG SPOT 30 SX COMMON 3% CC AT 3700'. 2ND PLUG PERFORATE AT 1810 & PUMP 40 SX CMT. 3RD PLUG TEST PIPE. 4TH PLUG PERFORATE PERMIAN @ 950'. PUMP 80 SX CMT OVER 5 1/2" CASING VOLUME & 150 SX CMT FOR BACKSIDE.

Plugging Proposal Received By: STEVE DURRANT WitnessType: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 07/16/2003 2:00 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

PBTD 4570'. PERFS AT 4430-4452'. CIBP @ 4570'. PACKER, TUBING, & RODS LEFT IN HOLE AT 3767'. SHOT TUBING OFF AT 3767'. PUMP 30 SX COMMON CMT W/3% CC AT 3737'. PERFORATE AT 1810'. RUN TUBING TO 1812' & SPOT 40 SX COMMON CMT WITH 3% CC. WAIT 1 1/2 HOURS. PRESSURE UP TO 200#. HELD FOR 15 MINUTES. PERFORATED AT 950'. RUN TUBING TO 962'. CIRCULATED 74 SX CMT TO SURFACE. PULLED TUBING AND TIED ONTO CASING. PUMPED 36 SX CMT. PRESSURED TO 1000# AND HELD. SHUT IN WITH 1000#. TIED ONTO BACKSIDE & PUMPED 20 SX CMT. PRESSURED TO 500# AND HELD.


RECEIVED

JUL 25 2003
7-25-03
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY SWIFT SERVICES. NO CASING RECOVERED.

Plugged through: TBG

District: 01

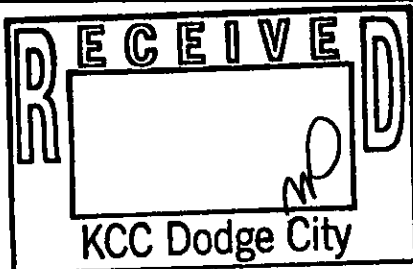


Signed

Michael Maier

(TECHNICIAN)

APPROVED



Form CP 7/3