

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-151-20721-00-00  
Spot: S2S2SW Sec/Twnshp/Rge: 12-27S-15W  
165 feet from S Section Line, 1320 feet from W Section Line  
Lease Name: WARD Well #: 2-12  
County: PRATT Total Vertical Depth: 4672 feet

Operator License No.: 31000  
Op Name: PRATER OIL & GAS OPERATIONS, INC.  
Address: 906 WILLIAM WAY  
PRATT, KS 67124

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		4340		WITH 2 SX CMT
PROD	4.5	4578	2200	WITH 150 SX CMT
SURF	8.625	370		WITH 200 SX CMT

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 06/19/2012 8:30 AM  
Plug Co. License No.: 5105 Plug Co. Name: CLARKE CORPORATION  
Proposal Rcvd. from: MARK MORGENSTERN Company: CLARKE CORPORATION Phone: (620) 886-5665

Proposed Plugging Method: SET CIBP @ 4342' WITH 2 SX CMT. PLUG AT 960' WITH 10 SX GEL & 50 SX CMT. PLUG AT 390' WITH 50 SX CMT. PLUG AT 60' WITH 20 SX CMT.

Plugging Proposal Received By: KENNY SULLIVAN WitnessType: NONE  
Date/Time Plugging Completed: 06/19/2012 10:00 AM KCC Agent: KENNY SULLIVAN

Actual Plugging Report:

SET CIBP @ 4340' & 2 SX CMT. 1ST PLUG AT 960' WITH 10 SX GEL & 50 SX CMT.  
2ND PLUG AT 390' WITH 50 SX CMT. 3RD PLUG AT 60' WITH 20 SX CMT.

Perfs:

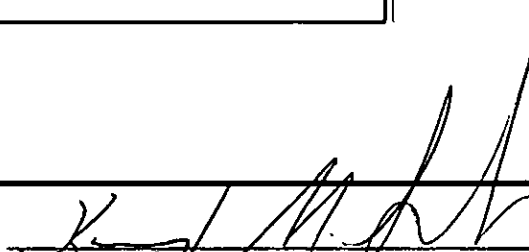
Top	Bot	Thru	Comments
4392	4408		

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: TBG

District: 01

Signed

  
(TECHNICIAN)

RECEIVED  
JUN 28 2012  
KCC WICHITA

RECEIVED

JUN 22 2012

KCC DODGE CITY