


15-135-00186-00-00

DISTRICT CONSERVATION AGENT'S REPORT

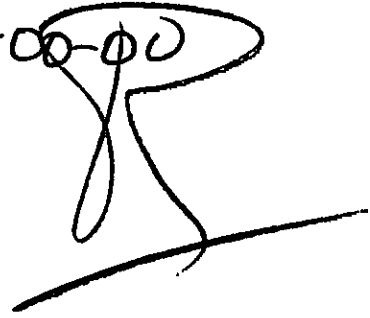

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. 18-20

LOCATION NW-NW-NE

SEC. 31 TWP. 19 RGE. 25 W

Dry Hole _____ Abandoned Oil Well Abandoned Gas Well _____

I have this date completed supervision of plugging of:

Well No. 1 Lease Bowman

Operator Loren W. Hallam Address Box 566 Salina Kans.

Field _____ County Ness

Total Depth 4603 Feet.


Plugging Contractor K & O Casing Pulling Co.

Plugging Contractor's License No. # 206

Address Stafford, Kans.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 13" (D) 340' C.W.C. Oil string 5 1/2" (D)
Set 4552' w/100 sq of Cem. L.W.P. 4480' Top Perf. 4454'
Sand to 4440' and dump 5 sq Cem. Shot off and
pulled 5 1/2" casing. Pumped plug and 150 sq
Cem. Displaced plug to approx 350' Filled hole
to 20' with mud and cemented to surface.
Fresh water depth in this area approx 360' to
400'

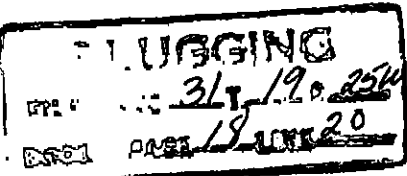

RECEIVED
STATE CORPORATION COMMISSION

APR 2 1954
04-08-1954

Warren W. Horner
District Conservation Agent

Date April 6, 1954