


15-135-21159-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

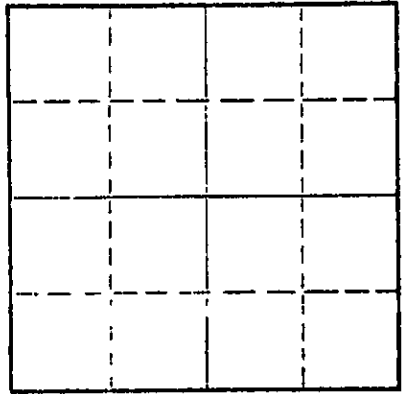

Locate well correctly on above Section Plat

Ness County, Sec. 20 Twp. 18S Rge. (E)24 (W)  
Location as "NE/CNW/SW" or footage from lines C/SW SE  
Lease Owner Graves Drilling Company  
Lease Name Stenzel Well No. 1  
Office Address 910 Union Center, Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed February 16 19 76  
Application for plugging filed February 16 19 76  
Application for plugging approved February 16 19 76  
Plugging commenced February 16 19 76  
Plugging completed February 16 19 76  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey, Hays, Kansas  
Producing formation Depth to top Bottom Total Depth of Well 4360 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	8-5/8"	0	293'			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.  
Hole plugged as follows: Plugged at 500' with 50 sacks of 50-50 pozmix and 2% gel; plugged at 250' with 25 sacks of 50-50 pozmix and 2% gel; plugged at 40' with 10 sacks of 50-50 pozmix and 2% gel. Plug down at 8:15 A. M. February 16, 1976.


2-24-76 FEB 24 1976

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Strata Drilling Company  
Address P. O. Box 355, Great Bend, Kansas 67530

STATE OF KANSAS, COUNTY OF BARTON, KS.  
Kenneth J. Link (Signature) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.  
(Signature) Kenneth J. Link, President  
P. O. Box 355, Great Bend, Kansas 67530  
(Address)

SUBSCRIBED AND SWORN to before me this 20th day of February, 1976

My commission expires December 14, 1977



Elaine H. Taylor Notary Public

15-135-21159-0000

D R I L L E R S      L O G

#1 Stenzel

CASING RECORD:  
289' of used 8-5/8"  
surface casing.

COMPANY: Graves Drilling Company

DESCRIPTION: C/SW SE  
Section 20-18S-24W  
Ness County, Kansas

CONTRACTOR: Strata Drilling Company

TOTAL DEPTH:  
4360'

COMMENCED: February 7, 1976

ELEVATION: 2319' KB

COMPLETED: February 16, 1976

D. & A.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Surface Soil	0	310	Ran 289' of used 8-5/8" surface casing; set and cemented at 293' with 185 sacks of common cement, 2% gel and 3% C. C. Plug down at 8:00 P. M. February 7, 1976.
Shale & Sand	310	1240	
Shale	1240	2225	
Shale & Lime	2225	4045	
Lime	4045	4145	
Lime & Shale	4145	4340	
Lime, Shale & Chert	4340	4350	
Lime	4350	4360	

ROTARY TOTAL DEPTH: 4360'

Ran four Drill Stem Tests.

Ran Electric Log.

D. & A.

Hole plugged as follows: Plugged at 500' with 50 sacks of 50-50 pozmix and 2% gel; plugged at 250' with 25 sacks of 50-50 pozmix and 2% gel; plugged at 40' with 10 sacks of 50-50 pozmix and 2% gel. Plug down at 8:15 A. M. February 16, 1976.

RECEIVED  
STATE CORPORATION COMMISSION

FEB 24 1976

CONSERVATION DIVISION  
Wichita, Kansas

STATE OF KANSAS )  
                          ) ss.  
COUNTY OF BARTON)

I certify that this is a true and correct copy of the above log to the best of my knowledge.

STRATA DRILLING COMPANY

*Kenneth J. Link*  
Kenneth J. Link, President

Subscribed and sworn to before me this 20th day of February, 1976.

My Commission Expires:

December 14, 1976

*Elaine H. Taylor*  
Elaine H. Taylor, Notary Public

