

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Ness County, Sec. 7 Twp. 18 Rge. 22W
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines
C SE SE

Lease Owner Anadarko Production Company
Lease Name Funk 'B' Well No. 1


Office Address Box 351, Liberal, Kansas 67901
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole

Date Well completed 3/8/81 19
Application for plugging filed 3/8/81 19
Application for plugging approved 3/8/81 19
Plugging commenced 3/8/81 19
Plugging completed 3/8/81 11 a.m. 19
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Marion Schmidt
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____
Show depth and thickness of all water, oil and gas formations. RTD 4750

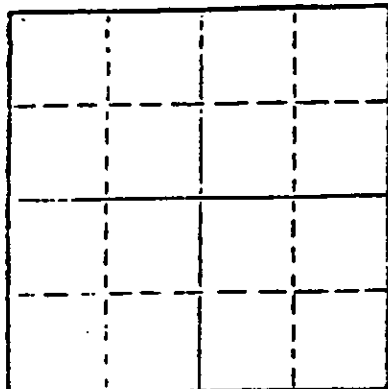

Locate well correctly on above Section Plot

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface	0	610'	8-5/8"	yes	no

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

1st plug @ 740' with 70 sacks
2nd plug @ 270' with 35 sacks
Bridge at 40' with 10 sacks
5 sacks in rathole
Job complete @ 11 a.m. 3/8/81

13 30-1981
CONS. DIV.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Slawson Drilling Company, Inc.


STATE OF Kansas COUNTY OF Sedgwick, ss.
James C. Remsberg, Slawson Drilling Co., Inc. (employee of owner) or (owner or operator of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James C. Remsberg
James C. Remsberg
200 Douglas Building, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 24th day of March, 1981

Mary Lou Taylor
Mary Lou Taylor Notary Public.

My commission expires January 17, 1985



15-135-21940-00-00

DRILLERS LOG

OPERATOR: Anadarko Production Company
 Box 351
 Liberal, Kansas 67901

WELL NAME: #1 Funk 'B'
 C SE SE Sec.7-18S-22W
 Ness County, Kansas

CONTRACTOR: Slawson Drilling Company, Inc.
 200 Douglas Building
 Wichita, Kansas 67202

COMMENCED: 2/23/81

COMPLETED: 3/8/81

RTD: 4750'

SURFACE CASING: 8-5/8" set at 610' with 400 sx cement

0' to 621' 12½" Surface Hole
 621' to 2600' Shale
 2600' to 2745' Shale & Lime
 2745' to 2952' Lime & Shale
 2952' to 3293' Shale & Lime
 3293' to 3465' Lime & Shale
 3465' to 3684' Lime
 3684' to 3810' Shale & Lime
 3810' to 4350' Lime
 4350' Mississippian
 4350' to 4750' Lime
 RTD 4750'

STATE OF KANSAS

COUNTY OF SEDGWICK

I, James C. Remsberg, of the Slawson Drilling Company, Inc.
 hereby state the above is an accurate copy of the #1 Funk 'B' log
 for Anadarko Production Company.

James C. Remsberg
 James C. Remsberg

Subscribed and sworn to me this
 24th day of March, 1981

Mary Lou Tayler
 Mary Lou Tayler, Notary

My commission expires January 17, 1985

MAR 30 1981
 03-30-1981

