

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
200 Colorado Derby Building  
Wichita, Kansas 67202

FORM CP-1  
Rev. 03/92

WELL PLUGGING APPLICATION FORM  
(PLEASE TYPE FORM and File ONE Copy)

JUL 13 1998  
07-13-98  
CONSERVATION DIVISION

API # 15-135-23,917-000 (Identifier number of this well). This must be listed for wells drilled since 1967; if no API# was issued, indicate spud or completion date.

WELL OPERATOR Pickrell Drilling Company, Inc. KCC LICENSE # 5123  
(owner/company name) (operator's)

ADDRESS 110 N. Market, Suite 205 CITY Wichita,

STATE Kansas ZIP CODE 67202 CONTACT PHONE # (316) 262-8427

LEASE Bauer Trust "J" WELL# 4 SEC. 23 T. 17S R. 26 (East/West)

NE - NW - NE SPOT LOCATION/QQQQ COUNTY Ness

4950 FEET (in exact footage) FROM S/N (circle one) LINE OF SECTION (NOT Lease Line)

1650 FEET (in exact footage) FROM E/W (circle one) LINE OF SECTION (NOT Lease Line)

Check One: OIL WELL  GAS WELL  D&A  SWD/ENHR WELL  DOCKET# \_\_\_\_\_

CONDUCTOR CASING SIZE \_\_\_\_\_ SET AT \_\_\_\_\_ CEMENTED WITH \_\_\_\_\_ SACKS

SURFACE CASING SIZE 8 5/8" SET AT 225' CEMENTED WITH 150sx SACKS

PRODUCTION CASING SIZE 4 1/2" SET AT 4453' CEMENTED WITH 200sx SACKS

LIST (ALL) PERFORATIONS and BRIDGEPLUG SETS: Stage collar @ 1821' w/350sx  
Open Hole 4453-4455

ELEVATION 2502' / 2507' T.D. 4455 PBD T.D. \_\_\_\_\_ ANHYDRITE DEPTH 1832(+675)  
(G.L./K.B.) (Stone Corral Formation)

CONDITION OF WELL: GOOD  POOR  CASING LEAK  JUNK IN HOLE

PROPOSED METHOD OF PLUGGING Use 60-40 poz w/6% gel. Run tbg. in hole, spot 15sx cement on bottom, pull tbg. to 1800', circ. hole full of cement. POOH w/tbg. Fill hole w/ cement from surface. Tie into 8 5/8" x 4 1/2" annulus and attempt to squeeze cement.  
(If additional space is needed attach separate page)

IS WELL LOG ATTACHED TO THIS APPLICATION AS REQUIRED? Yes IS ACO-1 FILED? Yes

If not explain why? \_\_\_\_\_

PLUGGING OF THIS WELL WILL BE DONE IN ACCORDANCE WITH K.S.A. 55-101 et. seq. AND THE RULES AND REGULATIONS OF THE STATE CORPORATION COMMISSION.

LIST NAME OF COMPANY REPRESENTATIVE AUTHORIZED TO BE IN CHARGE OF PLUGGING OPERATIONS:

Ed Mondero PHONE# (785) 798-2430

ADDRESS P.O. Box 375 City/State Ness City, Kansas 67560

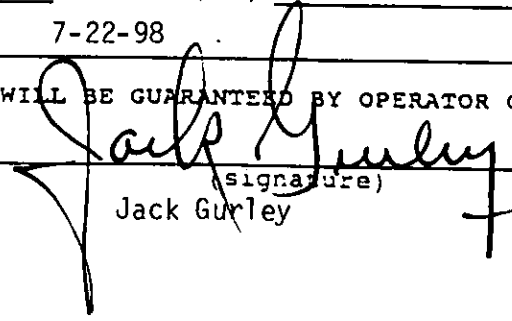
PLUGGING CONTRACTOR Allied Cementing Co. Inc. KCC LICENSE # \_\_\_\_\_

ADDRESS P.O. Box 628 - Great Bend, KS. 67530 PHONE # (316) 793-5861  
(company name) (contractor's)

PROPOSED DATE AND HOUR OF PLUGGING (If Known?) 7-22-98

PAYMENT OF THE PLUGGING FEE (K.A.R. 82-3-118) WILL BE GUARANTEED BY OPERATOR OR AGENT

DATE: 7-10-98 AUTHORIZED OPERATOR/AGENT: \_\_\_\_\_

  
Jack Gurley



## Kansas Corporation Commission

Bill Graves, Governor   John Wine, Chair   Susan M. Seltsam, Commissioner   Cynthia L. Claus, Commissioner

### NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

July 15, 1998

Pickrell Drilling Company, Inc.  
110 N. Market, Suite 205  
Wichita, Ks. 67202

Bauer Trust "J" #4  
API 15-13523917 - 0000  
NE NW NE  
Sec. 23-17S-26W  
Ness County

Dear Pickrell Drilling,

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

**Please contact the district office for approval of your proposed plugging method at least at five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.**

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

**This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.**

Sincerely,

A handwritten signature in cursive script, appearing to read "David P. Williams".

David P. Williams  
Production Supervisor

District: #1  
304 W. McArtor  
Dodge City, KS 67801  
(316) 225-8888