

135
15-20632-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

Location as "NE/CNW/SW" or footage from lines Ness County, Sec. 27 Twp. 17S Rge. 24W (E) (W) NE NW

Lease Owner Beardmore Oil Inc.
Lease Name Rufenacht "A" Well No. 1
Office Address Suite 700 - One Twenty Building, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 6-25-72
Application for plugging filed 6-25-72
Application for plugging approved 6-25-72
Plugging commenced 6-25-72
Plugging completed 6-25-72

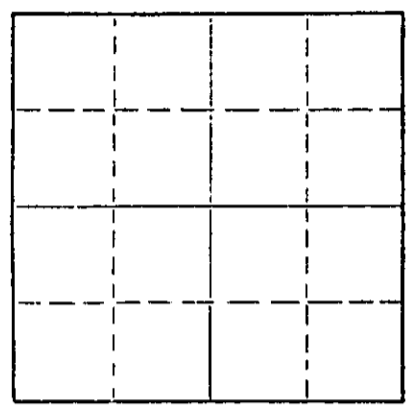

Reason for abandonment of well or producing formation commercial quantities of oil not found
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Bill Nichols - Morland, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4495 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	257'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mudded back to 700', plug w/ 110 cu. ft.
" " to 280', plug w/ 30 cu. ft.
Top Plug @ 40' w/ 10 cu. ft., 50/50 pos, 6% gel.

RECEIVED
STATE CORPORATION COMMISSION
JUL 10 1972
CONSERVATION DIVISION
Wichita, Kansas
07-10-1972

Name of Plugging Contractor Rains & Williamson Oil Co., Inc.
Address 435 Page Court, 220 West Douglas, Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick, ss.
Wilson Rains, President of Rains & Williamson Oil Co., Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wilson Rains
435 Page Court, 220 W. Douglas, Wichita, Kansas 67202
(Address)

Subscribed and sworn to before me this 28th day of June, 19 72
My commission expires October 4, 1975
Juanita M. Green Notary Public.




WELL LOG

15-35-20632-00-00

COMPANY Beardmore Oil Inc.
FARM Rufenacht "A" NO. 1
RIG. NO. 1
TOTAL DEPTH 4495
COMM. 6-14-72 COMP. 6-25-72
CONTRACTOR Rains & Williamson Oil Co., Inc.

SEC. 27 T. 17S R. 24W
LOC. NE NW

COUNTY Ness
KANSAS



CASING
20 10
15 8 5/8" @ 257' w/ 160 sx. com. cem. 2% gel,
12 6 2% cc.
13 5

ELEVATION

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Post Rock	48
Shale	200
Shale and Shells	1090
Shale	1205
Sand	1460
Shale and Red Bed	1760
Anhydrite	1796
Shale	1810
Pyrite-Shale	1960
Shale-Lime Streaks	2000
Shale and Lime	2225
Lime and Shale	2885
Shale and Lime	3145
Lime and Shale	3455
Shale and Lime	3680
Lime and Shale	3885
Lime	4435
Coring	4471
Lime	4495
<u>Rotary Total Depth</u>	<u>4495</u>

RECEIVED
STATE CORPORATION COMMISSION
JUL 10 1972
CONSERVATION DIVISION
Wichita, Kansas
07-10-1972

State of Kansas
County of Sedgwick } ss:

I, Wilson Rains, President of the Rains & Williamson Oil Co., Inc.

upon oath state that the above and foregoing is a true and correct copy of the log of the Rufenacht "A" #1 well.

Wilson Rains
Wilson Rains

Juanita M. Green
NOTARY PUBLIC
Juanita M. Green



Subscribed and sworn to before me this 28th day of June 19 72

October 4, 1975