

15-135-20970-00-00

FORM CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Ness County, Sec 21, Twp 17S Rge (E) 24W

Location as "NE/CNWKSW" or footage from lines C W/2 SW NE

Lease Owner Black Petroleum Company

Lease Name J. Kraus Well No. 2

Office Address 545 O.W. Garvey Bldg., Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 11-22 19 74

Application for plugging filed 11-22 19 74

Application for plugging approved 11-22 19 74


Plugging commenced 11-22 19 74

Plugging completed 11-22 19 74

Reason for abandonment of well or producing formation No commercial quantities of oil or gas encountered.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

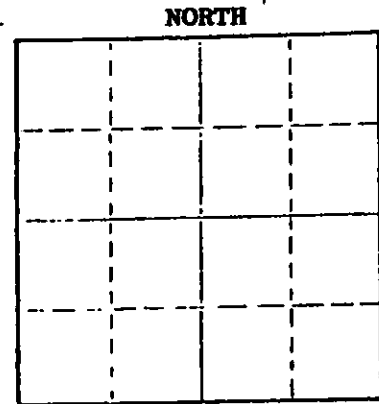

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation Depth to top Bottom Total Depth of Well 4390

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Hole	Water	Surface	287	8-5/8"	277	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Fluid to 675', plug, 70 sx cement;
Fluid to 240', plug, 20 sx cement;
Fluid to 40', 1/2 sx hulls, 10 sx cement;

RECEIVED
STATE CORPORATION COMMISSION

DEC 5 1974

CONSERVATION DIVISION
Wichita, Kansas

12-05-1974

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor D N B DRILLING, INC.

Address 701 First Nat'l Bldg., Wichita, Kansas 67202

STATE OF KANSAS COUNTY OF ss.

JAMES L. DONELSON (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James L. Donelson

701 First Nat'l Bldg., Wichita, Kansas

(Address) Nov. 74

SUBSCRIBED AND SWORN TO before me this 25th day of

Ella Priess

Ella Priess Notary Public

My commission expires August 25, 1976

Ella Priess
STATE NOTARY PUBLIC
Sedgwick County, Kansas
My Com. Expires Aug. 25, 1976

15-135-20970-00-00

DRILLERS' LOG

BLACK PETROLEUM COMPANY
No. 2 J. Kraus
C W/2 SW NE, Sec. 21-17S-24W
Ness County, Kansas

Elevation: 2400 K.B.

Commenced: 11-13-74
Completed: 11-22-74

Surface Casing: 277' of
8-5/8" cemented w/225 sx
common cement, 2% Gel, 3%
cc. 11-14-74

<u>FORMATION</u>	<u>DEPTH</u>
Surface Hole	0 - 287
Shale & sand streaks	287 - 1047
Blaine Anhydrite	1047 - 1061
Shale	1061 - 1115
Shale, Sand & Red Bed	1115 - 1682
Anhydrite	1682 - 1714
Shale & Red Bed	1714 - 1805
Shale	1805 - 2200
Shale & Lime	2200 - 2375
Lime & Shale	2375 - 3770
Lime	3770 - 4390 T.D.

RECEIVED
STATE DEPARTMENT OF REVENUE
NOV 20 1974
12-05-1974
REGISTRATION DIVISION
Topeka, Kansas

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

D N B DRILLING, INC.

James L. Donelson
JAMES L. DONELSON

STATE OF KANSAS: ss:

Subscribed and sworn to before me, the undersigned, a Notary Public in and for said state, this 25th day of November, 1974.

My Commission Expires:
August 25, 1976

Ella Priess
Ella Priess, Notary Public

Ella Priess
STATE NOTARY PUBLIC
Sedgwick County, Kansas
My Com. Expires Aug. 25, 1976