

RECEIVED

STATE OF KANSAS  
STATE CORPORATION COMMISSION APR 11 1979

PALOMINO WELL PLUGGING RECORD  
PETROLEUM

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

County. Sec. 21 Twp. 17S Rge. 24W E/W  
Location as "NE/CNW 1/4 SW 1/4" or footage from lines  
SW SE NE


Lease Owner Palomino & Darrah, et al  
Lease Name Keilman D Well No. #1  
Office Address 500 Insurance Building, Wichita, Kansas 67202  
Character of Well (Completed as Oil, Gas or Dry Hole) dry hole

Date Well completed April 11, 1979 19  
Application for plugging filed April 11, 1979 19  
Application for plugging approved April 11, 1979 19  
Plugging commenced April 11, 1979 19  
Plugging completed April 11, 1979 19  
Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation Depth to top Bottom Total Depth of Well 4422'  
Show depth and thickness of all water, oil and gas formations.

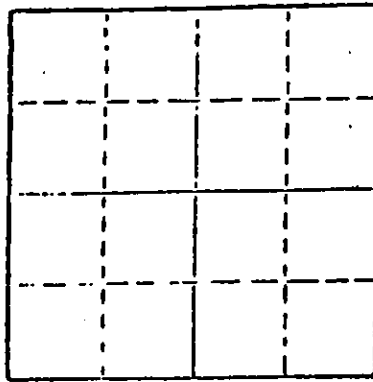

Locate well correctly on above Section Plot

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set. Hole plugged with 60-40 pozmix, 6% gel, as follows: 70 sacks @ 720', 20 Sacks @ 240', hulls and 10 sacks @ 40'. Plugging completed at 1:00 a.m., April 11, 1979.

RECEIVED  
STATE CORPORATION COMMISSION  
MAY 05 1979  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Strata Drilling Company

STATE OF KANSAS COUNTY OF BARTON, ss.  
Charles W. Steincamp (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Charles W. Steincamp  
P. O. Box 355, Great Bend, Kansas 67530  
(Address)

SUBSCRIBED AND SWORN TO before me this 9th day of April, 1979

Loneita Barry Notary Public.

My commission expires 3-28-80



15-135-21599-00-00

RECEIVED  
APR 13 1979  
PALOMINO  
PETROLEUM

DRILLERS LOG

Keilman D #1

CASING RECORD:  
7 jts. new 8-5/8"  
20# surface  
casing

COMPANY: Palomino & Darrah, et al  
CONTRACTOR: Strata Drilling Company  
COMMENCED: April 3, 1979

DESCRIPTION: SW SE NE  
Section 21-17S-24W  
Ness County, Kansas

TOTAL ROTARY  
DEPTH: 4422'

COMPLETED: April 11, 1979

ELEVATION: 2433' KB

D & A

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Surface soil, post rock	0	305	Ran 288' new 20# 8-5/8" surface casing, set and cemented @ 293' with 180 sacks common cement, 2% gel, 3% C.C. Cement circulated. Plug down at 6:00 a.m., April 5, 1979.
Shale, sand, shale	305	1730	
Anhydrite	1730	1761	
Shale	1761	2150	
Lime and shale	2150	4390	
Lime	4390	4422	

Ran one drill stem test.

Hole plugged with 60-40 pozmix, 6% gel, as follows: 70 sacks @ 720', 20 sacks @ 240', hulls and 10 sacks @ 40'. Plugging completed at 1:00 a.m., April 11, 1979.

RECEIVED  
STATE CORPORATION COMMISSION  
MAY - 1 1979  
05-01-1979  
CONSERVATION DIVISION  
Wichita, Kansas

STATE OF KANSAS )  
                          ) ss  
COUNTY OF BARTON)

I certify that this is a true and correct copy of the above log to the best of my knowledge.

STRATA DRILLING COMPANY

Charles W. Steincamp  
Charles W. Steincamp

Sworn to and subscribed before me this 13th day of April, 1979.

My appointment expires 3-28-80.

Loneita Barry  
Loneita Barry, Notary Public

