


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

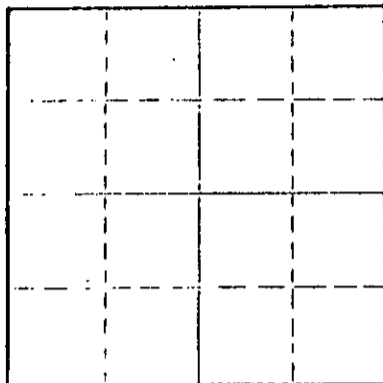

Locate well correctly on above
Section Plat

Ness County, Sec. 14 Twp. 17S Rge. XX 23(W)
Location as "NE/CNW&SW" or footage from lines C NE SE
Lease Owner Rains & Williamson Oil Co.
Lease Name RYAN Well No. 1
Office Address 1425 Wichita Plaza, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed August 24 1964
Application for plugging filed August 24 1964
Application for plugging approved August 24 1964
Plugging commenced August 24 1964
Plugging completed August 24 1964
Reason for abandonment of well or producing formation No oil or gas found
in commercial quantities.
If a producing well is abandoned, date of last production - - 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4520 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	416'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set plug @ 416', cement with 20 sacks cement,
mud back to 180', set plug and hulls, cement
with 20 sacks cement, mud back to 40', set
plug and cement with 10 sacks cement. Plug
down 2:40 a.m. 8-24-64.

*Rec'd
8-27-64*

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rains & Williamson Oil Co.
Address 1425 Wichita Plaza, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Wilson Rains (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Wilson Rains*
Wilson Rains
1425 Wichita Plaza, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 26th day of August 1964

My commission expires January 8, 1968

Shirley Keck
Shirley Keck
Notary Public.

15-135-60338-0000

ROTARY DRILLING LOG

Operator: Rains & Williamson Oil Co.
No. 1 RYAN
C NE SE Sec. 14-17S-23W
Ness County, Kansas

CONTRACTOR; Rains & Williamson
Oil Co.
COMMENCED: 8-12-64
COMPLETED: 8-24-64
REMARKS: Set 416' 8-5/8" surface
casing with 225 sacks
GL3 cement.

FORMATIONS:

Shale	570
Sand & Shale	650
Shale	990
Anhydrite	1000
Shale	1080
Sand	1335
Shale & Shells	1655
Anhydrite	1675
Shale	1990
Shale & Shells	2305
Shale & Lime	2475
Lime & Shale	2955
Shale & Lime	3168
Shale	3325
Shale & Lime	3635
Lime & Shale	3900
Lime	4160
Lime & Shale	4255
Lime	4293
Lime & Shale	4345
Lime	4365
Lime & Chert	4520
Rotary Total Depth (D&A)	4520

RECEIVED
STATE CORPORATION COMMISSION

AUG 27 1964

CONSERVATION DIVISION
Wichita, Kansas

We certify the above log is true and
correct to the best of our knowledge
and belief.

RAINS & WILLIAMSON OIL CO.

Wilson Rains
Wilson Rains, Partner

Subscribed and sworn to before me, a Notary Public in and for the
State of Kansas, County of Sedgwick, this 26th day of August, 1964.

My Commission Expires:
January 8, 1968

Shirley Keck
Shirley Keck, Notary Public