


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Ness County. Sec. 17 Twp. 17S Rge. 23W E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines _____
NE SE NE
Lease Owner Petro-Pak Corporation
Lease Name SNODGRASS #1 Well No. #1
Office Address Suite 150, 1535 Grant Street, Denver, CO 80203
Character of Well (Completed as Oil, Gas or Dry Hole) _____
Dry Hole

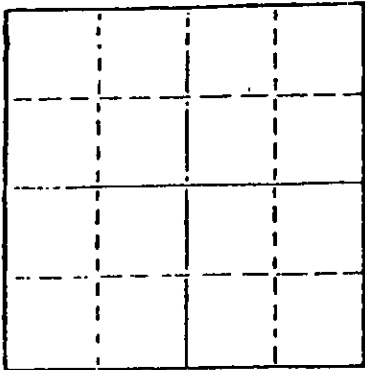

Locate well correctly on above
Section Plot

Date Well completed April 13 1981
Application for plugging filed April 13 1981
Application for plugging approved April 13 1981
Plugging commenced April 13 1981
Plugging completed April 13 1981
Reason for abandonment of well or producing formation _____
No commercial quantity of oil or gas encountered.
If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Marion Schmidt.
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4496'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

T.D. @ 4496'
Set 1st Plug @ 900' with 65 sacks.
Set 2nd Plug @ 330' with 30 sacks.
Set 3rd Plug @ 40' Solid Bridge with 10 sacks.
Rathole with 5 sacks. 50-50 posmix, 6% gel.
State Plugger - Marion Schmidt.

Plug was down @ 12:30 a.m., 4/13/81.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.



STATE OF Kansas COUNTY OF Sedgwick, ss.
Jack L. Partridge, Vice President (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) Jack L. Partridge
801 Union Center, Wichita, KS 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 16th day of April 1981

Suzanne M. Hofer
Suzanne M. Hofer
Notary Public
Wichita, Kansas

My commission expires 2/4/85



CONTRACTOR'S WELL LOG

15-135-21956-0000

OPERATOR: Petro-Pak Corporation
 CONTRACTOR: Abercrombie Drilling, Inc.
 WELL NAME: SNODGRASS #1
 LOCATION: NE SE NE, Section 17-17S-23W
 Ness County, Kansas
 SPUD DATE: 3/31/81
 COMPLETION DATE: 4/13/81

0	2349	Clay, Sand & Shale
1349	1783	Sand & Shale
1783	1816	Anhydrite
1816	1825	Sand & Shale
1825	3230	Shale
3230	3400	Shale & Lime
3400	3570	Lime
3570	4088	Shale & Lime
4088	4130	Lime & Chert
4130	4207	Lime
4207	4333	Lime & Chert
4333	4402	Lime
4402	4496	Lime & Chert
	4496	Rotary Total Depth

Spud hole @ 4:30 p.m. Drilled 321' of a 12 1/4" hole. Ran 8 jts. of 8 5/8" - 20# casing (tally 314.88) Set @ 321' K.B. Cemented with 200 sacks of common 3% c.c. Cement did circulate. Pumped the plug to 282' K.B. Plug was down @ 1:00 a.m., 4/02/81.

T.D. @ 4496'. Set 1st Plug @ 900' with 65 sacks. Set 2nd Plug @ 330' with 30 sx. Set 3rd Plug @ 40' Solid Bridge with 10 sacks. 5 sacks in rathole, 50-50 posmix, 6% gel. State Plugger - Marion Schmidt. Plug was down @ 12:30 a.m., 4/13/81.

SAMPLE TOPS:

Anhydrite 1783'
 B/Anhydrite 1816'


STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

Jack L. Partridge, Vice President of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the SNODGRASS #1, NE SE NE, Section 17-17S-23W, Ness County, Kansas.

ABERCROMBIE DRILLING, INC.

BY: Jack L. Partridge
 Jack L. Partridge, Vice President

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 16th day of April, 1981.



RECEIVED
 STATE CORPORATION COMMISSION

APR 22 1981

Suzanne M. Hofer
 Suzanne M. Hofer, Notary Public