


15-135-21428-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Ness County, Sec. 16 Twp. 18 Rge. 23 E/W
Location as "NE/CNW/SW" or footage from lines _____
150 NE NE SW
Lease Owner Mull Drilling Co.
Lease Name Beardslee A Well No. _____
Office Address Wichita, Kansas 67202
Character of Well (Completed as Oil, Gas or Dry Hole) _____

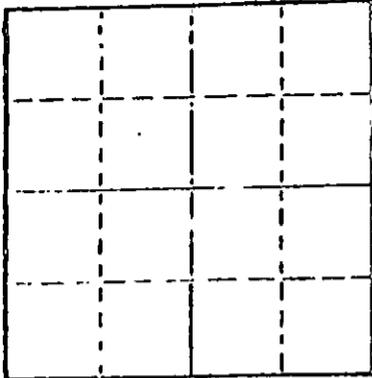

Locate well correctly on above
Section Plot

Date Well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 12/4/78 _____ 19____
Plugging completed 12/28/78 _____ 19____
Reason for abandonment of well or producing formation _____
depleted.
If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4352
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	243	none
				5 1/2"	4343	2581

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

Sanded to 4300' and ran 4 sacks cement. Loaded hole, shot pipe at 3796', 3435',
2768', 2571', pulled 72 joints. Pumped 5 sacks gel, 70 sacks cement, 15 sacks gel and
70 sacks cement.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION

(If additional description is necessary, use BACK of this report)
Name of Plugging Contractor KELSO CASING PULLING
CHASE, KANSAS 01-15-1979


STATE OF KANSAS COUNTY OF RICE, ss.
R. DARRELL KELSO (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso
CHASE, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 12th day of Jan., 19 79

Margaret Miller
Notary Public.

My commission expires _____



WELL LOG
Beardslee A #1
NE NE SW 16-18S-23W
Ness County, Kansas

15-135-21428-00-00

Name of Operator: Mull Drilling Co., Inc.
415 Page Court, 220 W. Douglas
Wichita, Kansas 67202

Date Completed: March 9, 1978

FROM	TO	
0	103	Shale
103	1575	Shale and sand
1575	1580	Shale
1580	1614	Anhydrite
1614	1825	Shale
1825	2030	Shale and sand
2030	2565	Shale and lime
2565	2795	Shale and shells
2795	3250	Shale and lime
3250	3475	Shale and shells
3475	4145	Shale and lime
4145	4250	Lime
4250	4352	Shale and lime
4352		Total Depth

15-135-21428-00-00
12-04-1978

STATE OF KANSAS

COUNTY OF BARTON ss

George E. Miller, Jr., President of Blue Goose Drilling Co., Inc. being first duly sworn on oath says: That I have knowledge of the facts, statements and matters herein contained and the log of the above described well as filed and that the same are true and correct.

George E. Miller, Jr.
George E. Miller, Jr.

Subscribed and sworn before me this 13th day of March, 1978.

Mary Ann Schwarborn
Notary Public Barton County

My Commission Expires 8-1-81

