

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-173-20719-00-01
Spot: SWNESE Sec/Twnshp/Rge: 14-29S-1E
1650 feet from S Section Line, 990 feet from E Section Line
Lease Name: CHARLES OWWO Well #: 1-14
County: SEDGWICK Total Vertical Depth: 3497 feet

Operator License No.: 4419
Op Name: BEAR PETROLEUM, LLC
Address: PO BOX 438
HAYSVILLE, KS 67060

String	Size	Depth (ft)	Pulled (ft)	Comments
COND	13.375	88		120 SX
PROD	4.5	3490	1990	150 SX
SURF	8.625	302		200 SX

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 04/02/2012 10:00 AM
Plug Co. License No.: 3004 Plug Co. Name: GRESSEL OILFIELD SERVICE, LLC
Proposal Rcvd. from: GEORGE RAYL Company: GRESSEL OILFIELD SERVICE, LLC Phone: (620) 960-1288

Proposed Plugging Method: SAND BACK TO 3440' AND CAP W/4 SX, THEN RUN UP TO 350' AND SHOOT OFF PRODUCTION PIPE @ 2500 OR SO, PULL PIPE THEN @ 350' CIRC. CEMENT TO SURFACE.

Plugging Proposal Received By: DAN FOX Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 04/03/2012 4:00 PM KCC Agent: DAN FOX

Actual Plugging Report:

SANDED BACK TO 3443' AND CAPPED WITH 2 SX CMT. SHOT OFF PRODUCTION CASING AT 1990' AND PULLED 4.5" PRODUCTION CASING. RAN 1" TUBING DOWN TO 365' AND CIRC. CEMENT TO SURFACE W/127 SXS. 60-40 POS-MIX 4% GEL. OPERATOR WILL COME BACK AND TOP OFF IT NEEDED AND CUT OFF SURFACE CASING 4' BELOW GROUND SURFACE, THEN GRADE AREA. CEMENT TICKET #32811.

Perfs:

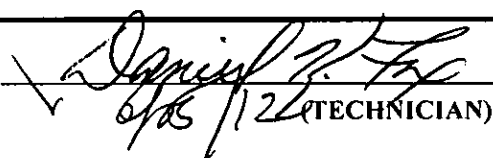
Top	Bot	Thru	Comments
3490	3497		CSG

Remarks: WELL WAS PLUGGED BECAUSE OF NON -PRODUCTION AND BEYOND 10 YR T/A LIMITATION.

Plugged through: TBG

District: 02

Signed


04/03/12 (TECHNICIAN)

RECEIVED
Form CP-2/3

MAY 24 2012

KCC WICHITA