

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-063-21995-00-00
Spot: SWSWSEW Sec/Twnshp/Rge: 30-12S-31W
2550 feet from N Section Line, 1410 feet from W Section Line
Lease Name: CLARK TRUST Well #: 1-30
County: GOVE Total Vertical Depth: 4750 feet

Operator License No.: 5214
Op Name: LARIO OIL & GAS COMPANY
Address: 301 S MARKET ST
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	266		165 sx

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 06/28/2012 12:00 AM
Plug Co. License No.: 5929 Plug Co. Name: DUKE DRILLING CO., INC.
Proposal Revd. from: RICH Company: DUKE DRILLING CO., INC. Phone: (620) 793-0834

Proposed Plugging Method: Ordered 205 sx 60/40 pozmix - 4% gel cement with 1/4# flo- seal per sack.
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: PAT STAAB Witness Type: NONE
Date/Time Plugging Completed: 06/28/2012 5:45 PM KCC Agent: PAT STAAB

Actual Plugging Report:

1st plug @2486 w/25 sx
2nd plug @1523 w/100 sx
3rd plug @316 w/40 sx
4th plug @40 w/10 sx

Rathole 30 sx

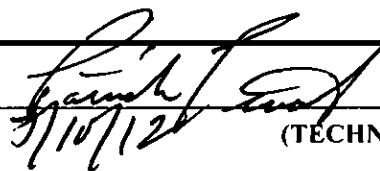
Perfs:

Remarks: ALLIED

Plugged through: DP

District: 04

Signed


5/10/12
(TECHNICIAN)

(TECHNICIAN)

CM

JUL 03 2012

RECEIVED

Form CP-2/3

JUL 09 2012

KCC WICHITA