


15-135-21288-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

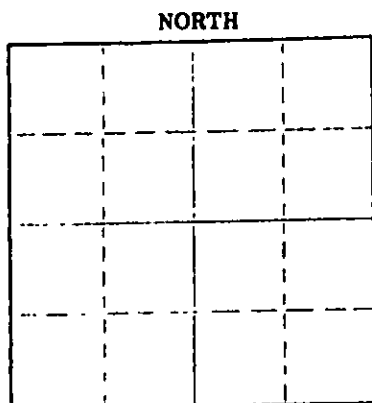

Locate well correctly on above Section Plat

Ness County. Sec. 2 Twp. 19 Rge. 25W (E) (W)
Location as "NE/CNW&SW&S" or footage from lines C NW NE
Lease Owner Donald C. Slawson
Lease Name Humburg 'B' Well No. 1
Office Address 408 120 Building, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed January 30, 1977 19
Application for plugging filed 1/30 19 77
Application for plugging approved 1/30 19 77
Plugging commenced 1/30 19 77
Plugging completed 1/30 19 77
Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo F. Massey, Hays, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4500' F...
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
8 5/8"	397.44'				404'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

1st plug @ 550' w/50 sx
2nd plug @ 240' w/25 sx
bridge plug @ 40' w/10 sx
2 sx in rat hole

RECEIVED
STATE CORPORATION COMMISSION
FEB 15 1977
02-15-1977
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Slawson Drilling Company, Inc.
Address 408 120 Building, Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick ss.
R.J. Thatcher (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R.J. Thatcher
R.J. Thatcher, 408 120 Building, Wichita, Ks
(Address)

SUBSCRIBED AND SWORN TO before me this 14th day of February, 19 77

My commission expires 11/9/80
MarGene Hamer Notary Public.



15-135-21288-00-00

WELL LOG

OPERATOR: Donald C. Slawson
 408 120 Building
 Wichita, Kansas 67202

LEASE: #1 Humburg "B"
 C NW NE Sec. 2-19-25W
 Ness County, Kansas

CONTRACTOR: Slawson Drilling Company, Inc.

COMMENCED: January 21, 1977

COMPLETED: January 30, 1977

CASING: Set 8-5/8" @404' w/250 sx 60/40 poz

0 - 407 Sand & Clay
 407 - 1590 Shale
 1590 - 1663 Shale & shells
 1663 - 1698 Anhydrite
 1698 - 1905 Shale
 1905 - 2485 Shale & shells
 2485 - 3810 Lime & shale
 3810 - 3970 K.C. Lime
 3970 - 4425 Lime
 4425 - 4500 Mississippi
 4500 RTD

RECEIVED
 STATE CORPORATION COMMISSION

FEB 15 1977

CONSERVATION DIVISION
 Wichita, Kansas

02-15-1977

STATE OF KANSAS)
) SS.
 COUNTY OF SEDGWICK)

I, R. J. Thatcher, of the Slawson Drilling Company, Inc. upon oath state that the above and foregoing is a true and correct copy of the log of the #1 Humburg "B" well.

R. J. Thatcher
 R. J. THATCHER

Subscribed and sworn to before me this 14th day of February, 1977.

Margene Hamer
 Margene Hamer, Notary Public

My Commission Expires: 11/9/80

