


15-135-21203-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

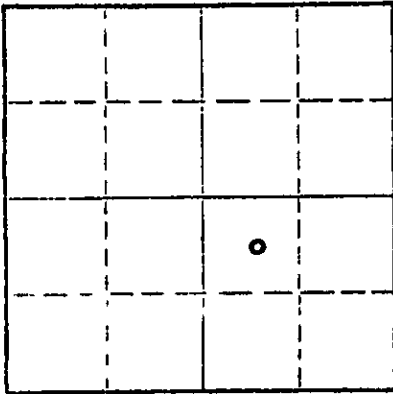

Locate well correctly on above  
Section Plot

Ness County, Sec. 2 Twp. 19S Rge. (E) 25 (W)  
Location as "NE/CNW/SW" or footage from lines 150' E. C/NW/4 SE/4  
Lease Owner Lifestyle Energy Corporation  
Lease Name Wm. Baldwin Well No. 1  
Office Address 100 N. Central Expressway, Suite 809, Richardson, Texas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole 75080  
Date well completed May 21 19 76  
Application for plugging filed May 21 19 76  
Application for plugging approved May 21 19 76  
Plugging commenced May 21 19 76  
Plugging completed May 21 19 76  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey, Hays  
Producing formation Depth to top Bottom Total Depth of Well 4492 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	8-5/8"	0	327'			

06-01-1976


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.  
Hole plugged as follows: Plugged at 550' with 70 sacks of 50-50 pozmix and 6% gel; plugged at 240' with 20 sacks of 50-50 pozmix and 6% gel; plugged at 40' with 10 sacks of 50-50 pozmix and 6% gel. Plug down at 10:15 P. M. May 21, 1976.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Strata Drilling Company  
Address P. O. Box 355, Great Bend, Kansas 67530

STATE OF KANSAS, COUNTY OF BARTON, ss.  
Charles W. Steincamp (employee or owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.  
STRATA DRILLING COMPANY  
(Signature) Charles W. Steincamp  
Charles W. Steincamp, Secy/Treas.  
P. O. Box 355, Great Bend, Kansas 67530  
(Address)

Subscribed and sworn before me this 24th day of May, 1976

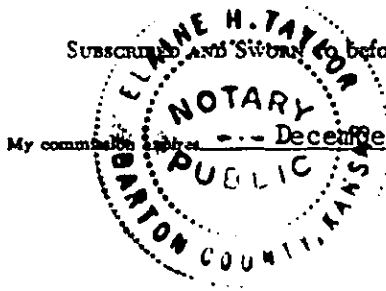

Elaine H. Taylor  
Notary Public

15-135-21203-00-00

D R I L L E R S      L O G

#1 Wm. Baldwin

CASING RECORD: 322' of new 8-5/8" surface casing.	COMPANY:      LIFESTYLE ENERGY CORPORATION	DESCRIPTION: 150' E. C/NW/4 SE/4 Section 2-19S-25W Ness County, Kansas
TOTAL DEPTH:	CONTRACTOR:    STRATA DRILLING COMPANY	
	COMMENCED:    May 15, 1976	
	COMPLETED:   May 21, 1976	ELEVATION:    2378' GL

D. & A.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Surface Soil	0	340	Ran 322' of new 8-5/8" surface casing; set and cemented at 327' with 200 sacks of common cement, 2% gel and 3% C. C. Cement circ. Plug down at 12:15 A. M. May 16, 1976.
Shale	340	2635	
Lime & Shale	2635	4365	
Lime	4365	4492	
ROTARY TOTAL DEPTH:	4492'		

No drill stem tests were run.

Electric log was run.

D. & A.

Hole plugged as follows: Plugged at 550' with 70 sacks of 50-50 pozmix and 6% gel; plugged at 240' with 20 sacks of 50-50 pozmix and 6% gel; plugged at 40' with 10 sacks of 50-50 pozmix and 6% gel. Plug down at 10:15 P. M. May 21, 1976.

06-01-1974

STATE OF KANSAS )  
                          ) ss.  
COUNTY OF BARTON)


I certify that this is a correct and true copy of the above log to the best of my knowledge.

STRATA DRILLING COMPANY

Charles W. Steincamp  
Charles W. Steincamp, Secy-Treas.

Subscribed and sworn to before me this 21st day of May, 1976.

My Commission Expires:  
December 14, 1977



Elaine H. Taylor  
Elaine H. Taylor, Notary Public