

15-007-20208-000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

Barber County, Sec. 22 Twp. 34S Rge. (E) 15 (W)

Location as "NE/CNW/SW" or footage from lines 100' NW of E/2 W/2

Lease Owner Okmar Oil Company

Lease Name Davis Ranch Well No. 1-22

Office Address 1130 Vickers-KSB&T Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed September 23, 1972

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced September 23, 1972

Plugging completed September 23, 1972

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes (G. Russell Biberstein of Attica)

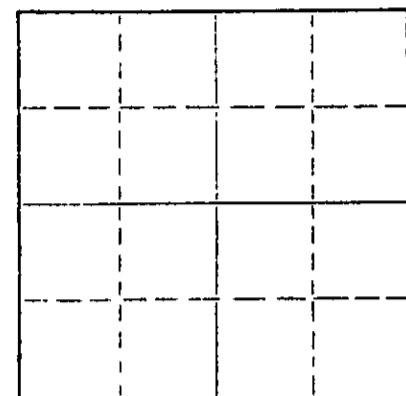

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well

Producing formation Depth to top Bottom Total Depth of Well 4800 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface	0	239'	8-5/8"	239'	None
	Casing					

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy Mud from Total Depth to 400 Feet,  
50 sax Cement Plug; Mud to 50 Feet,  
1/2 sax Hulls, Plug & 20 sax Cement to  
Base of Cellar; 2 sax Cement in Rat Hole.  
Job Completed @ 8:00 P.M.

RECEIVED  
STATE CORPORATION COMMISSION  
SEP 28 1972  
CONSERVATION DIVISION  
Wichita, Kansas

Name of Plugging Contractor HOWCO  
Address P. O. Box 693, Great Bend, Kansas 67530

STATE OF KANSAS COUNTY OF SEDGWICK  
Clarence Michael of Sage Drilling Co. (employee of owner) or owner or operator of the above described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.

(Signature) Clarence Michael


500 Bitting Building, Wichita, Kansas

(Address)

Subscribed and sworn to before me this 27th day of September, 1972.

Louise K. Whitted  
Notary Public

My commission expires November 26, 1974.



15007-20208-0000

DRILLERS LOG

DAVIS RANCH NO. 1-22

CASING RECORD:	OPERATOR: Okmar Oil Company	DESCRIPTION:
8-5/8" @ 239' w/225 sax cement	CONTRACTOR: Sage Drilling Co.	100' NW of E/2 W/2 Sec. 22-34S-15W Barber Co., Kansas
TOTAL DEPTH: 4800'	COMMENCED: September 14, 1972	ELEVATION: 1570KB
	COMPLETED: September 23, 1972	

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Sand & Red Bed	0	239	
Red Bed	239	1040	
Shale w/Gyp Streaks	1040	1560	
Shale w/Lime Streaks	1560	1660	
Shale & Lime	1660	1885	
Lime & Shale	1885	2420	
Shale & Lime	2420	2695	
Lime & Shale	2695	4190	
Lime	4190	4800	D&A

RECEIVED  
STATE CORPORATION COMMISSION  
SEP 28 1972  
CONSERVATION DIVISION  
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

SAGE DRILLING CO., INC.

By Clarence Michael  
Clarence Michael



Subscribed and sworn to before me this 27th day of September, 1972.

Louise K. Whitted  
Louise K. Whitted, Notary Public

My commission expires:  
November 26, 1974.