


DISTRICT CONSERVATION AGENT'S REPORT

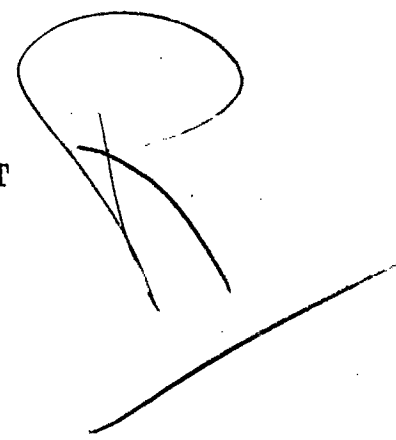

TO:

State Corporation Commission  
Conservation Division  
800 Bitting Building  
Wichita, Kansas

FILE NO. \_\_\_\_\_

LOCATION NE NW NE

SEC. 14 TWP. 11 RGE. 18 W

Dry Hole \_\_\_\_\_ Abandoned Oil Well x Abandoned Gas Well \_\_\_\_\_

I have today completed supervision of plugging of:

Well No. 3 Lease Deane

Operator West Supply Co Address Chase, Kans

Field Burnett County Ellis

Total Depth 3418 Feet.

(Describe briefly the manner in which the well was plugged)

8 5/8" at 1151', circulated with cement.

13' at 85' circulated with cement - 4 1/2" at 3410'.

Lane Wells plugs to 3161', perforations at 3110',

Chat 3161' to 3100', run 4 sax cement with dump bailer -

pulled 2800' 4 1/2", mudded hole to 250', set wood plug, rock bridge

and 20 sax cement - mudded hole to 35', set woodplug, rock bridge

and 10 sax cement to bottom cellar.

**PLUGGING**  
FILE SEC. 14 T. 4 R. 18 W  
BOOK PAGE 127 LINE 38

J. P. [Signature]  
District Conservation Agent

Date 11-29-49 DEC 1 - 1949

STATE COMMISSION  
KANSAS

