

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-077-21434-00-00
Spot: E2NE Sec/Twnshp/Rge: 7-33S-6W
3960 feet from S Section Line, 660 feet from E Section Line
Lease/Unit Name: WATT A Well Number: 1
County: HARPER Total Vertical Depth: 4518 feet

Operator License No.: 5086
Op Name: PINTAIL PETROLEUM, LTD.
Address: 225 NORTH MARKET, STE 300
WICHITA, KS 67202

Production Casing Size: 4.5 feet: 4517 100 SX CMT
Surface Casing Size: 8.625 feet: 259 200 SX CMT 146.84

Well Type: OIL UIC Docket No: Date/Time to Plug: 04/03/2003 5:15 PM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Revd. from: JOE MAES Company: QUALITY WELL SERVICE Phone: (316) 727-3410

Proposed Plugging Method: AS KCC REQUIRES

RECEIVED
KCC DISTRICT #2
APR 8 2003
WICHITA, KS

Plugging Proposal Received By: STEVE VANGIESON WitnessType: Plugging Operations Partially Witnessed
Date/Time Plugging Completed: 04/03/2003 5:15 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:


THE PERFS WERE COVERED WITH SAND TO 4432' AND CAPPED WITH 4 SKS OF CEMENT. THE CASING WAS RECOVERED FROM 3500', AND PULLED TO 1150', WHERE 35 SKS OF CEMENT WAS SPOTTED. THE CASING WAS PULLED TO 700', WHERE 35 SKS OF CEMENT WAS SPOTTED. THE CASING WAS PULLED TO 300', WHERE CEMENT WAS CIRCULATED TO SURFACE.

Remarks: ALLIED CEMENTING 60/40 4% GEL

Plugged through: CSG

District: 02

Signed

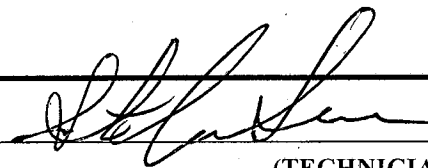

(TECHNICIAN)

INVOICED
DATE 4-9-03
INV. NO. 2003061391

Form CP-2/3