

15-135-21021-00-00


STATE OF KANSAS
CONSERVATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Reports
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

NORTH

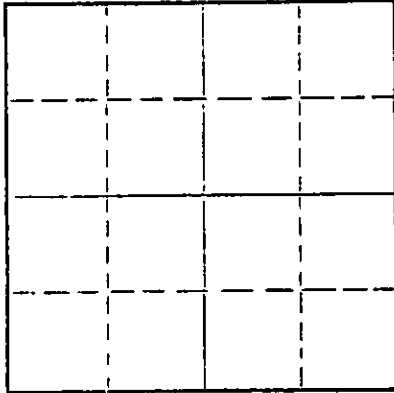

Locate well correctly on above
Section Plat

Ness County, Sec. 34 Twp. 18S Rge. (E) 23 (W)
Location as "NE/CNW/SW:" or footage from lines 150' E of C. SE. NW
Lease Owner O. A. Sutton
Lease Name Hawkinson Well No. 1
Office Address 800 Sutton Place, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed June 27 1975
Application for plugging filed June 27 1975
Application for plugging approved June 27 1975
Plugging commenced June 27 1975
Plugging completed June 27 1975
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4440 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	508'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plug @ 500' with 50 sacks. Plug @ 300' with 25 sacks. Plug @ 40' with solid bridge and 10 sacks cement. Job complete at 11:30 a.m. 6-27-75. Job by Halliburton.

RECEIVED
STATE CORPORATION COMMISSION

JUL 14 1975

CONSERVATION DIVISION
Wichita, Kansas

07-14-1975

Name of Plugging Contractor Gabbert-Jones, Inc.
Address 830 Sutton Place, Wichita, Kansas 67202

STATE OF KANSAS COUNTY OF SEDGWICK
Jack G. Paulsen (employee of contractor) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts presented and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

Jack G. Paulsen
800 Sutton Place, Wichita, Kansas 67202


(Address)

Subscribed and sworn to before me this 10th day of July, 1975.

My commission expires June 28, 1978.

Jean S. Taylor
Jean S. Taylor

Notary Public.



15-135-21021-00-00

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG

Hawkinson #1
C-SE-NW Sec 34-18S-23W
Ness County Kansas


Commenced: 6-16-75

Completed: 6-27-75

OPERATOR: O. A. SUTTON

Depth		Formation	Remarks
From	to		
0	513	Surface Clay-Sand	Ran 13 jts of New 24# 8 5/8"
513	942	Shale-Shells	csg set @ 508' Cemented w/
942	1563	Shale-Sand	300 sks Common 2% Gel
1563	1599	Anhy	3% CC PD @ 2:00 a.m.
1599	2079	Shale-Shells	6-17-75
2079	3224	Lime-Shale	
3224	3481	Lime	
3481	3910	Lime-Shale	
3910	4440	Lime	
	4440 TD		DRY & ABANDONED

I, James S. Sutton II, certify this is a correct copy of the Drillers' Log for the well drilled C-SE-NW Sec 34-18S-23W, Ness County, Kansas to the best of my knowledge and belief.


JAMES S. SUTTON II


STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 8th day of July, 1975, personally appeared James S. Sutton II to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.


ELIZABETH J. EDWARDS-NOTARY PUBLIC

My Commission Expires: February 6, 1979.



RECEIVED
STATE CORPORATION COMMISSION

JUL 14 1975
07-14-1975
CONSERVATION DIVISION
Wichita, Kansas